




## **ABOUT RUBI GROUP ELECTRIC TILE CUTTING** 0 **DIAMOND BLADES** Diamond blades (dry & wet cut).......22-26 **CUTTING & GRINDING** Pro-Edger, Bevelling and Mitering Accesories......29–30 **MANUAL TILE CUTTING SLAB SYSTEM.** Cutting and handling tools for large format tiles. Suction Cups 57-58 MIXING Mixing Paddles......61



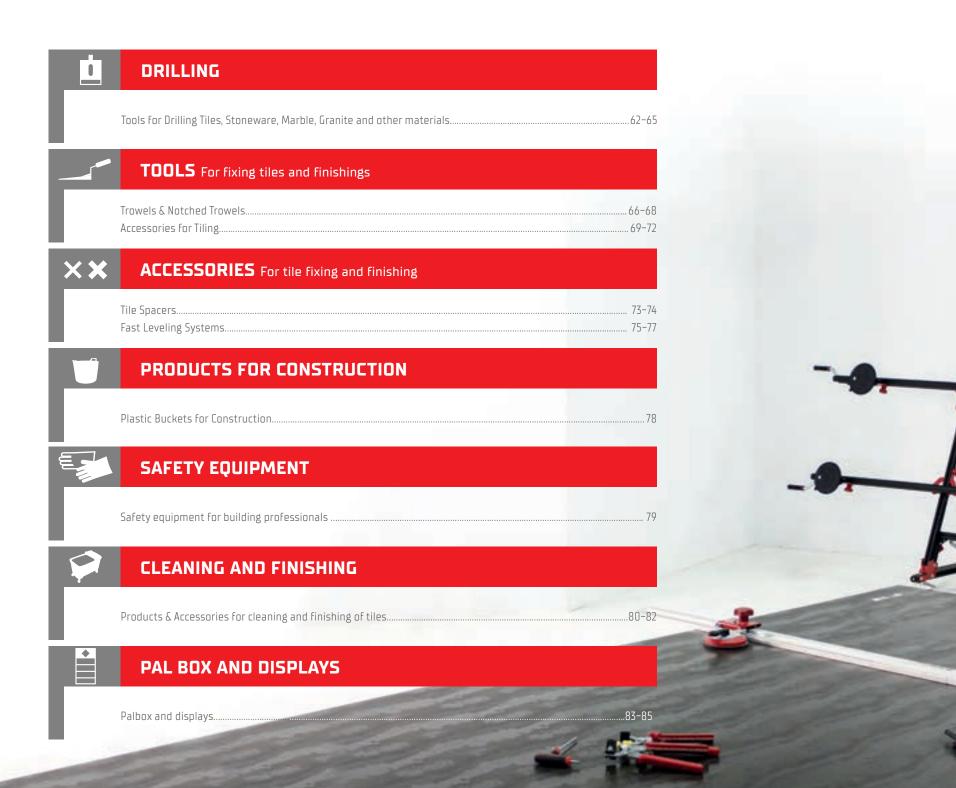

## **PURPOSE**

#### BETTER PROFESSIONALS, BETTER PLACES

Our "Better professionals. Better places" purpose explains our approach in the two key areas that improve the quality and performance of our industry: those people whose trade is visible to everybody so that it can be admired, along with the places transformed by their creativity. We want to change the future by being and creating better professionals and building better places in favour of a better world.

## **RUBI GROUP**

## **MISSION**

Our mission is to provide outstanding solutions for construction professionals, through the design, manufacture and distribution of tools and equipment which ensure maximum efficiency, cost-effectiveness and safety for optimal ceramic tile laying, thereby maintaining the identity of the Boada brothers as well as their corporate legacy so that we can all build a better future together.

## **VISION**

Our vision is to be a leading company at global level in solutions for cutting and laying tiles as a result of technological innovation and proximity to the user, thus improving the quality of life of our customers, partners, shareholders and society.



## THE BEST OPTION FOR EACH JOB SINCE 1951

Our history began in 1951, when brothers Joan and Antoni Boada i Sucarrats obtained the patent for their innovative tool for cutting hydraulic mosaic, glazed and ceramic tiles. Together, they produced 25 units in the garage of their house in Rubí, Catalonia. The new "RUBI mosaic and tile cutter" made its appearance at the first National Invention Exhibition in Barcelona, where it won the diploma of honour and gold medal.

The Boada brothers devoted themselves to developing and sharing their innovative technology with other professionals. In 1969, Mr Miquel Escayol i Vila joined them and the limited company Hermanos Boada S.A. was created.

Since then, the reputation of the company has spread throughout the world and the RUBI name has become synonymous with truly cutting-edge solutions that offer top craftsmen an unprecedented level of quality, efficiency and professionalism.

Thus, the RUBI Group specialises in the design, manufacture and distribution of machinery and tools for cutting, laying and maintaining tiles. Placing installers at the centre of our strategy means that innovation, high product quality and excellence are always present in our product range.

Currently, the RUBI brand is recognised by the most demanding construction and design professionals in more than 120 countries, thanks to our large international network of subsidiaries and branches.

The RUBI team works with the opportunities that new trends and technologies offer, as well as the advances relating to communication, safety and environmental responsibility, in order to lead in the construction sector, while staying faithful to our core values and devotion to providing solutions to the needs of tile installers around the world.

# WE PROVIDE QUALITY AND INNOVATION TO THE WORLD





People in the RUBI Team

3 Production and logistics centres

11 International subsidiaries

Corporate museum

20 Countries with RUBI brand distribution

+100 Official distributors

The year 1951 marked a milestone in the Spanish construction industry, when the young Boada brothers invented the professional manual cutter for hydraulic mosaic. This ground-breaking tool, christened with the name of RUBI, served as the stepping stone for developing Germans Boada, S.A. Currently, this multinational company designs, manufactures and distributes best-seller equipment and tools for cutting and laying tiles.

The group headquarters are located in Rubi, near Barcelona, and the logistics and industrial center is established in Santa Oliva (Tarragona). The productive and logistics center, recently expanded to 220.000 Sqf., counts on an automated warehouse and the latest technology in order management. These facilities and resources, combined with optimal inventory management, guarantee a daily service to major markets with tight

deadlines, satisfying the current needs multiple distribution channels worldwide. Its international vocation, very present since its creation, makes Germans Boada S.A. a global company with a presence in over 100 countries through an extensive network of branches and participated companies.

## **RUBI GROUP USA**

In 1999, due to the increasing satisfaction of thousands of tile installers worldwide, RUBI Group USA opened its doors to the most ambitious and skilled construction professionals in the United States. Strictly committed to its customers and distributors, the company is currently considered the leader manufacturer of tile laying equipment and related building tools in North America.

RUBI Group USA is heavily investing in the future of the tile industry. The company recognizes that in order to become a top influencer in the construction field, it has to be solidly pledged to the latest technology trends. Accordingly, RUBI Group USA offers cutting edge tile tools with an unparalleled level of guarantee.

Beyond history, sales or technology, the success of RUBI Group USA is rooted in a team of specialists and customer representatives who are always ready to face any kind of challenge. The team is also actively participating in the social conversation, monitoring what thousands of tile experts or knowledge seekers have to say about the brand. To stay tuned for the latest updates, events, and offers, visit us on Facebook, Twitter, YouTube and our blog Tiling World.

### **INNOVATION & QUALITY**

The essence of the RUBI brand is "a job well done". The perfect synthesis of our commitment to the goal of contributing best practices and performance to tiling worldwide. The above statement can be clearly appreciated in everything we do, and in the way our customers can use the products that we manufacture to carry out their work with special attention to quality, creativity and attention to detail.

#### INNOVATION

We are constantly researching and developing new solutions based on the evolution of market and technology trends, our own experience and ongoing conversations with our partners and other professionals.

### QUALITY

We only use materials of the highest quality and we work in compliance with strict design and manufacturing standards in order to offer tools with the performance levels that our users expect.

#### **GUARANTEE**

We strive to offer greater durability in our products and a peace of mind that comes from our long track record, also backed up by a customer support service and constant communication with the same global nature.

#### SOLUTIONS

Understanding and helping to shape our industry for generations has allowed us to create a wide range of tools that provide excellence and efficiency in the cutting and laying of tiles.

## TECHNOLOGICAL LEADERSHIP



Patented products.



Protected Industrial Designs.





## INSTALLATION IN PHASES

RUBI offers solutions that provide excellence in each step of the tiling process in order to guarantee quality, efficiency and creativity from start to finish. This is the basis for a clear marking on our entire range of products, with each product clearly indicating the stage it is intended for:

This approach provides a clear visual solution for product displays that directs the customer to the product that is suitable for the work in question.











## 1. Preparation

This stage includes all the processes prior to the installation of ceramic tiles. Starting with the preparation and levelling of the substrates and the verification of the levels. Followed by the setting out and design of the joint pattern and finishing with the preparation and application of the ceramic adhesive.



## 2. Cutting and Drilling

Although, after the preparation of the adhesive, this logically takes us to the installation stage, RUBI has included the cutting and drilling phase in second place. The reason is very simple, if we take into account that the tile needs to be cut (or drilled), it cannot be installed until this step has been carried out.

All installations require tiles to be adapted and resized to the installation space and, whether it is to a greater or lesser extent, a ceramic tile will always have to be cut (or drilled).



#### 3. Installation

In this stage, we mainly focus on bringing together all the necessary tools to ensure proper handling and installation of the tile, how to obtain the best results both in flatness and alignment in order to make the setting-out design a reality with maximum precision.



## 4. Grouting

As its name indicates, this stage includes all the tools necessary for the filling and definition of the tile joint, as well as the removal of excess material and a first cleaning stage.



## 5. Cleaning

As it must do, the last stage brings together everything that is necessary to deliver the perfect job. The final cleaning of any ceramic tile installation process will always make the first impression on any user. For this reason, it is as important as any of the previous stages.





 $\odot$ 



## DC-250 PYTHON

Cut & Drill

Moving head machine, versatility and precision For Wall tiles, floor tiles, porcelain tiles and other materials.































The cutting capacities can vary depending on the head position, special flanges and blade diameter

- Motor assembly mounted on sliding bearings for maximum precision and reliability. Foldable at 45° for perfect miter. Direct drive motor.
- 2 Steel plate structure. Sturdy and maximum resistance to working conditions.
- 3 Patented ZERO DUST system exclusive to RUBI and certified by TNO (Organisation for Applied Scientific Research), for safe exposure because of reduction of respirable dust particles generated during cutting.
- 4 C3 Pyhton cooling system. New adjustable refrigeration system. Allows to adjust the point of water's fall depending on the material's thickness, getting a direct impact of the water in the cutting point. This allows to increase the refrigeration's efficiency and to reduce water dispersion.
- · Foldable legs with wheels for an easier transportation and removable tables for easy cleaning of the machine.
- · Adjustable aluminum square  $(0^{\circ} 60^{\circ})$  with lateral stop for repetitive cuts at 0° and 45°.
- · Safety protector for turbo and segmented blades.
- · Blade cooling by water (50W water pump) with flow control.
- · Includes Premium Arrowhead 10" Blade.
- · Supplied with cable.

#### INCLUDED!



Ref. 31900 Arrowhead 10"

	REF	56911
DC-250 PYTHON 850	Voltage	120V-60Hz
	RPM	2790
DC-250 PYTHON 1200	REF	56914
	Voltage	120V-60Hz.
	RPM	2790



XX


## DCX-250 XPERT

Professional moving head machine for wet cutting with plunge effect. Suitable for intensive cutting of porcelain, stoneware and ceramic tile. For occasional cutting of natural stone such as marble or granite.





C E EAL






- 3 New adjustable cooling system. Increases cooling efficiency and reduces water dispersion.
- 4 High performance plunge effect. Cutting height adjustment.
- · Includes transport handle and off-road type reinforced wheels, which provide better transportability and handling of the machine.
- · Steel double settling system for improved efficiency and water recovery.
- · Angular measurement with aluminum square adjustable from 0° to 60° for repetitive cuts.
- · Includes reinforced folding legs with folding-prevention system and quick
- · External and easy to remove water tank with 8 gal. (30 L) capacity.
- · Includes improved splash guard system with auto-sliding protective cover.
- · Patented ZERO DUST system exclusive to RUBI certified by the TNO (Organisation for Applied Scientific Research), for safe exposure thanks to the reduction of the breathable dust particles generated during the cut.
- · Ergonomic bi-material handle for comfortable operation of the cutting
- · Earth integrated into the chassis.
- · Machine supplied with cable.

#### INCLUDED!



Ref. 31961 RED COBRA 10"

Et-minter at 24	



The cutting capacities can vary depending on the head position, special flanges and blade diameter.

DCX-250 XPERT 1250	REF	52962
	Voltage	120V-60Hz.
	RPM	3350
	REF	52972
	REF	JETTE
DCX-250 XPERT 1550	Voltage	120V-60Hz.























 $\odot$ 

RUBI

## **DS-250 N**

Cut & Drill

Mobile head machine for high accuracy, ideal for miter cuts. For Wall tiles, Floor tiles, Porcelain tiles, Marble, Granite and other materials.































Cutting capabilities may vary depending on the head position, special plates and blade diameter.

- Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- 2 Equipped with ZERO DUST system. Tested and certified by TNO (Organisation for Applied Scientific Research)
- Wheels and handle included. Easy transport.
- 4 Aluminum structure. Lighter cutter with maximum resistance to working conditions.
- · Removable aluminum tables for easy cleaning of the machine.
- · With thermic security switch.
- · Water pump refrigeration of blade with flow control valve.
- · With a double set of flanges, one especially designed for miter cuts.
- · Motor assembly mounted on sliding bearings for maximum accuracy miter cuts.
- · Safety protector for segmented blades.
- · With lateral stop for repetitive cuts.
- · Retractable legs with "shield" function and wheels for easy transportation.
- · Removable water tank system.
- · 2mW (milliwatt) line laser for precise cut.
- · Spirit level for easy field installation.
- · Blade Included.
- · Machine supplied with cable.
- · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

#### INCLUDED!



Ref. 31961 RED COBRA 10"

DS-250	REF	52934
N 1300 LASER&LEVEL	Voltage	120V-60 Hz.inch.
ZERO DUST	RPM	3400
DS-250	REF	52944
DS-250 N 1500 LASER&LEVEL	REF Voltage	<b>52944</b> 120V-60 Hz.Inch.



XX

## **DX-350 N**

Mobile head machine with plunge effect for total versatility. For all types of ceramic, porcelain tiles and building materials such as marble, granite, facade and fireproof bricks.































Cutting capabilities may vary depending on the head position, special plates and blade diameter.

- Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
  - 2 Equipped with ZERO DUST system. Tested and certified by TNO (Organisation for Applied Scientific Research).
  - 3 Aluminum structure. Lighter cutter with maximum resistance to working conditions.
  - 4 High performance plunge effect. Maximum cutting height.
  - · Equipped with protective safety system for segmented blades.
  - · With thermal security switch.
  - · Water pump refrigeration of blade with flow control valve.
  - · Premium blade Ø 12" (300 mm.) included.
  - $\cdot$  Allows the use of 0 12" and 14" blades.
  - · Adjustable mobile head with plunge effect capability.
  - · retractable legs with "shield" function and wheels for easy transportation.
  - · Motor on top and belt transmission.
  - · With lateral stop for repetitive cuts.
  - · Aluminum working surface removable for easy cleaning.
  - · Removable water tank system.
  - · 2mW line laser.
  - · Circular level for easy field installation.
  - · Machine supplied with cable.
  - · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector.

#### INCLUDED!



Ref. 31946 VIP TURBO MESH 12"

	REF	52918
DX-350 N 1300	Voltage	120V-60 Hz.Inch.
1300	RPM	3400





(o)

























 $\odot$ 

##



## **DU-200 EVO**

Cut & Drill

Mobile head cutter for renovations and light works. To cut ceramic and porcelain wall and floor tiles.



- Built-in foldable legs. Very easy to set up.
- 2 With wheels and handle for a more comfortable transport and handling.
- 3 External water tank, easy to handle and clean.
- <sup>3</sup> System, improves blade's cleaning and cooling for a higher performance.
- · Motor assembly mounted on sliding bearings and foldable for
- · With lateral stop for repetitive cuts and adjustable square from 0 to 45°.
- · Direct drive motor with thermal protector and reinforced
- · Corrugated tube to protect power cable and water pipe.
- Equipped with C<sup>3</sup> SYSTEM. The most effective cooling and cleaning system for blades. Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
- · Bi-material handle, better ergonomics.
- ·With CEV-SUPERPRO diamond blade 0 8" (200 mm).

#### INCLUDED!



Ref. 30946 CEV SUPERPRO 8"



	$\triangle$				$\Rightarrow$	Ø	Ø				
DU-200 EVO 650	PRO	25 %6"	17 ¹¹⁄₁6×17 ¹¹∕₁6"	1 3/8"	7/8"	1" & 5%"	8"	46 ½6x15 3%x40 ¾6"	51.8 Lb	1	9
DU-200 EVO 850	PRO	33 1/16"	24x24	1 3/8"	<b>7</b> ⁄8"	1" & %"	8"	53 %6x15 %x40 %6"	60 Lb	1	6

25 9/16/33 7/16° PATENTED

		REF	55907
	DU-200 EVO 650	Voltage	120V-60Hz. USA
		RPM	3200
		REF	54976
	DU-200 EVO 850	Voltage	120V-60Hz. USA
		RPM	3490

XX

## **DT-10IN MAX**

The DT 10in MAX is a portable over-head electric wet saw and is designed to handle professional tile jobs.

This powerful tile saw is recommended for cutting ceramic, porcelain, stone, and glass tile.







DT-10IN MAX





















- 36 inch rip and 25 inch square tile on diagonal will allow users to manage large tile with ease
- 2 Powerful 15 amp motor to cleanly cut through the toughest tile
- 3 Advanced water spray system includes the Rubi Zero Dust water spray capture system to bring the finest water particles back to the tank and keep the work area clean
- 4 Machined aluminum table with overmold glides along a patented rail system with the precision demanded by tile professionals
- · Large 5–gallon water tub separates waste water from sediment to extend pump life and provide cleaner water to the blade.
- · The Python cooling system's adjustable height brings water directly to the cut for improved blade cooling and a cleaner cut.
- · Adjustable laser guide enables fast alignment for custom diagonals, L-cuts, and non-through cuts by aligning the laser line with each mark for the cut.
- · Quick-Set stand helps setup and breakdown the saw quickly while the 8 inch wheels provide mobility for the entire saw across the jobsite in one simple trip.
- · Patented Python cooling system efficiently cools the blade.
- · Patented rail design allows for fast table adjustments and help protect the table roller while cleaning the saw.
- · Patented Easy-Ratchet stand locking system automatically locks stand in both operating and transport positions with an intuitive quick release for fast setup.
- · The toolless arbor lock and onboard tool storage makes blade changing easy.

#### INCLUDED!



Ref. 31900 Arrowhead 10"

	REF	26994
DT-10IN MAX	Voltage	120V-60 Hz.USA
	RPM	4000




























## **DT-7IN MAX**

RUBI

 $\odot$ 

##



Recommended for cutting ceramic, porcelain, stone and glass tile.







Incorporates tubular steel support and foldable, to transport the machine easily.

2 Universal motor with replaceable brushes.

3 With lateral stop for repetitive cuts with

- Tilting cutting head adjusts for precise 22.5 ° and 45 ° bevel cuts.
- · Water tank with level indication min. and max.

adjustment from 0 ° to 45 °.

- · Maximum capacity: 4.27 gal / 16.2 L
- · Aluminum main table. Rear water tray extensions in reinforced plastic..

#### INCLUDED!



REF Voltage

RPM

MAX

7" - 180 mm

26993

120V-60Hz. USA

6000

١		
)	1	DT-7II

$\int_{\mathbb{R}}$		
! Lb	1	DT-7IN
























XX

## **ND 7IN MAX**

Cut & Drill

Portable electric cutter.

Ideal for renovations and small tile jobs for cutting ceramic, porcelain, stone, and glass tile.





ND 7IN MAX













The cutting capacities may vary depending on the position of the head, special flanges and blade diameter.

- Machined aluminum table with tilting right table for 22.5 ° and 45 ° miter cuts.
  - Self-aligning extruded aluminum fence with single action lever for fast setup of accurate and repetitive cuts.
  - 3 Soft-Slip aluminum angle guide glides smoothly along the aluminum fence for 0° to 45° diagonal cuts.
  - Transparent splash guard provides a clear view of the blade and the line of cut for precision alignment.
  - · Perfect for repairs and renovations. Ideal for indoor work.
  - Anti-splash system that keeps dry the work area by reducing splash production.
  - Detachable rear table support allows straight cuts up to 24" in length.
  - · On-board tool storage for convenient blade changes.
  - · Integrated carry handle for easy portability to work sites.
  - Direct drive 1.0 HP induction motor with thermal protection.
  - · Large water tank provides continuous water to cut to reduce dust and cool blade.
  - · Tubular steel chassis with reinforced leg supports.
  - Premium laser-cut 7in. diamond blade included for fast and smooth cuts.

#### INCLUDED!



7" - 180 mm

	REF	45986
ND 7 IN MAX	Voltage	120V-60 Hz.USA
	RPM	3450





























 $\odot$ 

RUBI

## **ND 7IN READY**

Cut & Drill

Portable electric cutter. Ideal for renovations and small tile jobs for cutting ceramic, porcelain, stone, and glass tile.





- Stainless steel table with tilting right table for 22.5 ° and 45 ° miter cuts
- 2 Extruded aluminum fence with single action lever for fast setup of accurate and repetitive cuts
- 3 Soft-Slip angle guide glides smoothly along the aluminum fence for 0° to 45° diagonal cuts.
- 4 Transparent splash guard provides a clear view of the blade and the cut line for precision alignment.
- · Direct drive induction motor with thermal protection.
- · Premium laser-cut 7in. diamond blade included for fast and smooth cuts.
- · Non-slip feet for greater stability.
- · Tubular steel chassis.
- · Large water tank provides continuous water to cut to reduce dust and cool blade.

#### INCLUDED!




7" - 180 mm



	$\triangle$				⇌	$\varnothing$	Ø				
ND 7IN READY	PRO	20"	13"	1 1/4"	<b>%</b> "	5/8"	7"	22 ¾ x 19 ¾ x 10 ¾	21 Lb	1	20

The cutting capacities may vary depending on the position of the head, special flanges and blade diameter.



XX



	Name	Reference	Rip Cut	Diagonal	Blade	Arbor	Plunge cut	НР
	DU-200 EVO 650	54976	33''	24''	8''	1'' & 5/8''	N	1,1 HP
	DU-200 EVO 850	54907	26''	18''	8''	1'' & 5/8''	N	1,1 HP
	DC-250 850 PHYTON	56911	38''	27''	10"	5/8''	Y	1,5 HP
	DC-250 1200 PHYTON	56914	48''	33''	10"	5/8''	Y	1,5 HP
	DCX-250 XPERT 1250	52962	49''	35''	10"	5/8''	Y	2 HP
	DCX-250 XPERT 1550	52972	61"	43''	10''	5/8''	Y	2 HP
	DS-250 N 1300	52934	52"	37''	10"	1"	Ν	3 HP
HH	DS-250 N 1500	52944	60''	42''	10"	1"	Ν	3 HP
A	DX-350 N 1300	52918	58''	41"	12-14"	1"	Y	3 HP
	DT-10IN MAX	26994	36''	25''	10''	5/8''	Y	15 Amps
	DT-7IN MAX	26993	24"	18"	7*	5/8''	Y	10 Amps
	ND 7" READY	45985	20"	13"	7''	5/8''	N/A	3 / 4 HP
	ND 7" MAX	45986	24"	13"	7''	5/8''	N/A	1 HP





































· Facilitates positioning of the tile, while reducing the percentage of errors.

	REF	$\triangle$	
LATERAL STOP FOR DC/DCX/DS/DX	54822	SUPERPRO	1



RUBI

0

##

XX



- · Circular bubble level to facilitate proper positioning of the electric cutter.
- · Laser Tracer indicating the passage of the blade and facilitates placement of material.
- · Laser power: 2 mW (milliwatt).
- · Laser Class: 2.
- This accessory does not fit DC250 Python.

	REF	$\triangle$	
LASER & LEVEL KIT DV/DC/DCX/DS/DX	54999	SUPERPRO	1

## TILE FIXER DV/DC/DCX/DS/





- $\cdot$  Allows the fixing of the tile during cutting, thus avoiding sudden movements.
- · Accessory adaptable to DV,DC,DCX,DS and DX series (up to 2009].

	REF	$\triangle$	
TILE FIXER DV/DC/DCX/DS/DX	51916	SUPERPRO	1

#### **TABLE EXTENSION**



- · Increases work surface for large format tiles. 23 5/8"[600x230mm].
- · Maximum weight: 22Lb, (10kg).
- · Available in several models.

	REF	$\triangle$	
TABLE EXTENSION DS/DX (FROM 2014)	54991	SUPERPRO	1
TABLE EXTENSION DV/DC/DCX	54993	SUPERPRO	1







- · With rollers to simplify movement of the tiles.
- · With adjustable foldable legs.
- · Work surface 26 9/16"x22 5/8" (675x575mm) and maximum weight 154lb (70kg).
- · Installation on both sides of the machine.

	REF	$\triangle$	
ROLLER TABLE EXTENSION DU/	F101/	CHDEDDDO	
DC/DCX/DS/DX (FROM 2013)	51914	SUPERPRO	1



- · For enhanced holding of large tiles.
- · Suitable DT-10in MAX (Ref. 26994).
- · Included Stand extension legs to prevent the overturning of the stand.
- · Main table made in aluminum with top rubber
- · Guides made in extruded aluminum with reinforcement cross bars.

	REF	$\triangle$	
ACCESSORY TABLE 50IN DT-	58907	SUPERPRO	1
10IN MAX	20707	JUPERPRU	1

#### ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX





- · Adjustable to the maximum length of electric cutter.
- · Tile is held laterally thus avoiding any movement.
- · Especially suitable for blocking and execution of repetitive miter.

	REF	$\triangle$	
ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX	54844	SUPERPRO	1

#### **SET OF FLANGES FOR MITERING** CUTS



- · Great accuracy when making miters cuts.
- · Available in several models.

	REF	$\triangle$	
SET OF FLANGES Ø184MM DX-350	51915	SUPERPRO	1
SET OF FLANGES Ø130MM DV/DC/DX-250	57991	SUPERPRO	1
FLANGES FOR MITERING DT-10IN MAX	58906	SUPERPRO	1

























XX













quality 5.0 ★★★★ speed 4.5

- · For cutting all type of hard materials as granite, slate, natural stone, quartz conglomerate, rustic stoneware, clinker, refractory, and all kind of porcelain tiles.
- · This blade is a robust blade for heavy duty jobs and during cutting to counter any type of overheating, this blade has two ways for cooling.
- · 5/8" ring adapter included.

	REF	$\triangle$		$\bigcirc$	Ø	<b></b>	<b>(</b>
BLADE BADGE	74000		1	4"	5%" & 7%"	1/ "	3/8"
MESH DRY 4" USA	34900	PREMIUM	1	4	78 0.78	716	78
BLADE BADGE MESH	74001	DDEMILIM	1	6.17."	%" & %"	1/ "	3/8"
DRY 41/2" USA	34901	PREMIUM	1	4 1/2	78 & 78	716	7/8
BLADE BADGE			-	F"	5/" C 7/"	1/ "	3/"
MESH DRY 5" USA	34902	PREMIUM	1	5"	%" & %"	1/16"	3/8"

- · Ideal for cutting 20 mm thickness materials, such as porcelain, ceramic, natural stone and sintered stone.
- · Specially focused on landscaping materials.
- · Metal coating diamond to avoid the diamond graphiting during intensive work.
- · Heat resisting diamond metal alloy helps avoid the blade burning.
- · Good finish.
- · Long life.

_							
	REF	$\triangle$			$\emptyset$	<b>P</b>	
BLADE RED SWO WET/DRY 4" EXT	449114	PRO	1	4"	%" & %"	1/16"	3/8"
BLADE RED SWORD WET/DRY 4 1/2" EX	34904	PRO	1	4 ½"	%" & %"	1/16"	3/8"

- · Recommended blade for cutting hard materials such as granite, rustic tiles, dekton, clinker, refractory, slate and porcelain tile.
- $\cdot$  The turbo mesh design of the diamond band offers greater cutting speed on hard materials without sacrificing finish quality.
- · 5/8" ring adapter included.
- · Thicker center to avoid vibrations and wobbling.

	REF				$\otimes$	<b>P</b>	
VIP TURBO MESH	7407 /	DDEMILIM	1	4"	5%" & 7%"	1/ "	3/8"
DRY 4" USA	31926	PREMIUM	1	4	78 0.78	716	78
VIP TURBO MESH	31927	PREMIUM	1	7. 1/ "	5%" & 7%"	1/ "	3/8"
DRY 4 1/2" USA	31727	PREMIUM	1	4 -/2	78 A 78	716	78
VIP TURBO MESH	710/0	PREMILIM	1	5"	5%" £ 7%"	1/16"	3/8"
DRY 5" USA	J1747	PKLMIUM		J	/8 CL 78	716	78

#### **RED COBRA DRY**



#### **RED COBRA WET**



EXTRA LONG **LIFE** 





quality 5.0 \*\*\*\*
speed 4.5 \*\*\*\*

- · Recommended blade for cutting hard materials such as granite, rustic tiles, dekton, clinker, refractory, slate and porcelain tile.
- The turbo mesh design of the diamond band offers greater cutting speed on hard materials without sacrificing finish quality.
- · 5/8" ring adapter included.
- · Thicker center to avoid vibrations and wobbling.

	REF	$\triangle$			Ø	<b></b>	٥
VIP TURBO MESH	31929	PREMILIM	1	7"	%" &	1/16"	3/8"
WET 7" USA	31929	PREMIUM	1	1	7/8"	716	78
VIP TURBO MESH	31940	PREMILIM	1	8"	5⁄8" & 1"	1/16"	3/8"
WET 8" USA	31740	PREMIUM	1	U	78 6.1	716	78
VIP TURBO MESH	31941		1	10"	5⁄8" & 1"	1/16"	3/8"
WET 10" USA	51741	PREMIUM	1	10	78 & 1	716	78
VIP TURBO MESH	31946	PREMILIM	1	12"	1"	1/16"	3/8"
WET 12" USA	31740	PREMIUM	1	12	1	716	78
VIP TURBO MESH	31947	PREMIUM	1	14"	1"	1/8"	3/8"
WET 14" USA	51747	PREMIUM	1	14	1	78	78



quality 5.0 \*\*\*\*
speed 5.0 \*\*\*\*

- · Recommended blade to cut Porcelain, Ceramic, Marble, Granite, Natural Stone.
- · 5/8" ring adapter included.

	REF	$\triangle$		$\bigcirc$	$\varnothing$	<b></b>	<b>(</b>
RED COBRA DRY	Z1050	PREMIUM	1	4"	%" &	1/16"	1/4"
4" USA	11710	PKLIMIUM	1	-4	7/8"	/16	/4
RED COBRA DRY 4	71051	PREMIUM	1	4 1/2"	5⁄8" &	1/16"	1/"
1/2" USA	21421	PREMIUM	1	4 1/ 2	7/8"	716	-/4



quality 5.0

speed **4.5** ref.31960

quality 5.0 \*\*\*\*\*
speed 5.0 \*\*\*\*\*

ref.31961

- · Recommended blade to cut Porcelain, Ceramic, Glass, Marble, Granite, Natural Stone.
- · 5/8" ring adapter included.
- · Thicker center to avoid vibrations and wobbling.

	REF	$\triangle$			$\varnothing$	$\mathfrak{P}$	
RED COBRA WET	31960	PREMIUM	1	7"	%" &	1/16"	5/16"
7" USA	31700	PREMIUM	1		7/8"	716	-/16
RED COBRA WET	70000	PREMIUM	1	8"	%" & 1"	1/ "	5/16"
8" USA	30770	PREMIUM	1	0	78 6.1	716	-/16
RED COBRA WET	31961	PREMIUM	1	10"	%" & 1"	1/ "	3/8"
10" USA	31701	PREMIUM	1	10	78 6.1	716	-/8
RED COBRA WET	30999	PREMIUM	1	12"	1"	1/8"	3/8"
12" USA	JU777	PKLIMIUIM	1	12	1	/ 8	/8



































##


















#### quality 5.0 ★★★★★ speed 5.0 ★★★★

- · For cutting all types of ceramic, porcelain and natural stone materials.
- · For cutting thicknesses between 20mm (3/4") and 35mm [1-3/8"]".
- · Joint by laser welding.
- · Extra-long life.
- · Suitable for use on cutting tables and cut-off machines that incorporate guard systems in compliance with the standard for use of segmented blades.
- · Special bonded alloy that provides a good finish with a very fast cutting speed.

	REF	$\triangle$		Ø	Ø	<b>P</b>	٥
THICKER WET 10" USA	32962	PREMIUM	1	10"	%" & 1"	1/16"	3/8"
THICKER WET 12" USA	32963	PREMIUM	1	12"	1"	1/8"	3/8"
THICKER WET 14" USA	32964	PREMIUM	1	14"	1"	1/8"	3/8"



quality 4.0 ★★★★ speed 4.0 ★★★★



- · Turbo blade.Turbo edge for faster cutting.
- · High Tech. High speed.

**ARROWHEAD TURBO** 

· Use or wet or dry.

		REF	$\triangle$		$\bigcirc$	Ø	<b></b>	٥
ARROWHEAD WET &		71014	PREMILIM	1	4 1/2"	% &	1/16"	5/16"
DRY TURBO 4 1/2"		J1710	PKLIMIUM	1	4 /2	7/8"	/16	/16
ARROWHEAD WET &		70000	PREMILIM	1	7"	% &	1/16"	1/16"
DRY TURBO 7"		30703	PREMIUM	1	1	7/8"	716	716
ARROWHEAD	٨	7000%	PREMIUM	1	10"	% & 1"	1/16"	1/16"
WET 10"	()	30774	PREMIUM		10	78 & 1	716	716



- · Recommended blade to cut fine porcelain tiles.
- · High Tech. High speed.

	REF	$\triangle$		$\oslash$	Ø	$\bigcirc$	
ARROWHEAD 7"	31901	PREMIUM	1	7 "	5/8 "	1/16"	5/16"
ARROWHEAD 10"	31900	PREMIUM	1	10"	5/8 "	1/16"	3/8"

speed 4.0 ★★★★







































## quality 4.0 ★★★★★

speed 4.0 \*\*\*\* ref.31994 / 31998

|Carrelage |en Verre

quality 5.0 ★★★★

speed 3.0 ★★★★ ref.31999

- $\cdot$  Recommended blade to cut Glass mosaic, glass blocks and other glass materials.
- · High quality finish at low speed.

	REF	$\triangle$		$\bigcirc$	$\varnothing$	<b>P</b>	♦
GLASS	Z100/	PREMIUM	1	7 "	% " &	1/16"	1/4"
PREMIUM 7"	31774	PREMIUM	1	,	7/8"	716	-/4
GLASS	71000	PREMIUM	1	8"	% "₹ 1"	1/ "	5/16"
PREMIUM 8"	31998	PREMIUM	1	Ö	78 & I	1/16"	-/16
GLASS	71000	DDEMILIA	-	10"	5/ 11 € 111	1/ "	5/ 11
PREMIUM 10"	51999	PREMIUM	1	10"	% " & 1"	*/16	5/16"

- $\cdot$  Recommended blade to cut fine porcelain tiles.
- · High Tech. High speed on porcelain tiles.

		REF	$\triangle$			Ø	<u> </u>	ⓓ
PORCELAIN WET & DRY 4 1/2"	8	31914	PRO	1	4 1/2"	5/8" & 7/8"	1/16"	5/16"
WET & DRY 4 1/2" SUPER PRO	8	31913	SUPER PRO	1	4 1/2"	<sup>5</sup> /8" & <sup>7</sup> /8"	1/16"	3/8"
PORCELAIN 7"		31912	PRO	1	7"	5/8"	1/16"	5/16"
PORCELAIN 10"		31907	PRO	1	10"	5/8"	1/16"	5/16"

- · Recommended blade to cut fine natural stone.
- · High Tech. High speed on natural stone.

	REF	$\triangle$		Ø	Ø	<b></b>	٥
NATURAL STONE 7"	31918	PRO	1	7"	5/8"	1/16"	5/16"
NATURAL STONE 10"	31917	PRO	1	10"	5/8"	1/16"	3/8"

**(** 

##

<u>†</u>

XX

RUBI









Cut & Drill







	REF	$\triangle$		$\oslash$	Ø	<b>P</b>	$\Diamond$
GLASS 7"	31920	PRO	1	7 "	5/8"	1/16"	5/16"
GLASS 10"	31919	PRO	1	10"	5/8"	1/16"	3/8"

- · VACUUM BRAZED embossed plate.
- · For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- · For GRINDERS use.
- · Maximum recommended speed: 15,300 RPM.

	REF	$\triangle$		$\oslash$	Ø
VDF 100 FINE PRO	31974	PRO	1	4"	7/8"
VDG 100 COARSE PRO	31979	PRO	1	4"	7/8"

- · Blade for dry cutting and grinding.
- · For use with porcelain materials and natural stone.
- · A great combination. High performance and cutting speed with high-quality finishes.
- · Suitable for use with a grinder.

	REF	$\triangle$		$\varnothing$	Ø	<b></b>	٥
TGS 4"- USA	40919	SUPERPRO	1	4"	%" & %"	1/16"	1"
TGS 4 1/2"- USA	40921	SUPERPRO	1	4 1/2"	%" & %"	1/16"	1"



surfaces.

STONE CUP WHEEL

and buffing

04" (100 mm).

BACK-UP PAD 4

· VELCRO fastening.

· Perfect for buffing work on any type of natural stone,

31921 SUPERPRO

· Fixing brackets for flexible polishing and buffing blades

· Compatible with jobs dry and water-cooled.

· Connection polisher / grinder with 5/8" thread.

61934 SUPERPRO

Pad Support for polishing

especially granite and marble, and cured concrete



































5/8"

































- · For adjustment cuts and grinding on all types of porcelain and hard
- · For materials with <3/4" (20 mm) thickness.
- · Electroplated continous rim blade.
- · Two-sided and reversible blade for a better performance.
- · For grinders use.: Connection: 5/8" thread.

	REF	$\triangle$	Ø	
DIAMOND BLADE ECD 2IN1 4 1/2"	31976	PREMIUM	5/8"	1
DIAMOND BLADE ECD 2IN1 5"	31977	PREMIUM	5/8"	1





- $\cdot$  Specifically designed to bring back the diamonds on the rim of diamond blades when cutting porcelain.
- · Made of silicon carbide with a #20 grit.

	REF	$\triangle$	
N-CLEANING BLOCK	05974	SUPERPRO	5

· For cleaning of diamond blades.

**Cleaning Block** 

· Made of corindon with a #100 grit.

	REF	$\triangle$	
CLEANING BLOCK	05973	SUPERPRO	5

 $\odot$ 

##

XX








- · Range of diamond rubber pads for roughing and edge polishing, cutting and surfaces of natural stone and ceramic tile.
- · Semi-flexible. Good adaptation to the user's hand.
- · Wet use is recommended.
- · Different grit sizes:
- · # 60, # 120 and # 200 for roughing.
- $\cdot$  # 400 for polishing.
- Dimensions of the diamond plate:  $2^{3}/_{16} \times 3^{9}/_{16}$  (55x90 mm).
- Rubber pad dimensions:  $2^{5}/_{16} \times 3^{11}/_{16} \times 1^{3}/_{16}$  (58x94x30 mm).

	REF	$\triangle$	
DIAMOND POLISHING PAD GRIT # 60	61974	SUPERPRO	10
DIAMOND POLISHING PAD GRIT #120	61975	SUPERPRO	10
DIAMOND POLISHING PAD GRIT #200	61976	SUPERPRO	10
DIAMOND POLISHING PAD GRIT #400	61977	SUPERPRO	10



- $\cdot$  Resin polishing pads.
- $\cdot$  8 DRY polishing pads.
- · Maximum operating speed: 3,000 rpm.
- · Premium cooling technology on both versions (Dry & Wet).
- · Will remove scratches from all Natural Stones.

	REF	$\triangle$	$\varnothing$	
RESIN DRY POLISHING PAD 50 GRIT 4"	61911	SUPERPRO	4"	1
RESIN DRY POLISHING PAD 100 GRIT 4"	61913	SUPERPRO	4"	1
RESIN DRY POLISHING PAD 200 GRIT 4"	61915	SUPERPRO	4"	1
RESIN DRY POLISHING PAD 400 GRIT 4"	61931	SUPERPRO	4"	1
RESIN DRY POLISHING PAD 800 GRIT 4"	61932	SUPERPRO	4"	1
RESIN DRY POLISHING PAD 1500 GRIT 4"	61933	SUPERPRO	4"	1
RESIN DRY POLISHING PAD 3000 GRIT 4"	61940	SUPERPRO	4"	1
RESIN DRY POLISHING PAD FINAL BUFF 4" (WHITE)	61973	SUPERPRO	4"	1



- · Resin polishing pads.
- · 8 WET polishing pads.
- · Maximum operating speed: 4,500 rpm.
- · Premium cooling technology on both versions (Dry & Wet).
- · Will remove scratches from all Natural Stones.

	REF	$\triangle$	$\varnothing$	
RESIN WET POLISHING PAD 50 GRIT 4"	61942	SUPERPRO	4"	1
RESIN WET POLISHING PAD 100 GRIT 4"	61945	SUPERPRO	4"	1
RESIN WET POLISHING PAD 200 GRIT 4"	61957	SUPERPRO	4"	1
RESIN WET POLISHING PAD 400 GRIT 4"	61958	SUPERPRO	4"	1
RESIN WET POLISHING PAD 800 GRIT 4"	61959	SUPERPRO	4"	1
RESIN WET POLISHING PAD 1500 GRIT 4"	61961	SUPERPRO	4"	1
RESIN WET POLISHING PAD 3000 GRIT 4"	61964	SUPERPRO	4"	1
RESIN WET POLISHING PAD FINAL BUFF 4" (WHITE)	61971	SUPERPRO	4"	1

## **PRO-EDGER BEVELLING AND MITERING ACCESSORY**

Professional portable system for intensive use, especially designed for dry bevelling and mitering principally of large format tiles. It can bevel and miter porcelain, ceramic and any natural stone material of any length.















- It makes miter cuts at 45° up to a maximum thickness of 3/4", and with no thickness limitation for bevelling.
- Progressive bevelling and mitering at different depths to prolong the useful life of the grinding wheel and make bevelling easier for the user.
- 3 Compatible with 4 1/2" & 5" (115 & 125 mm) angle grinders with cable or battery that are easily and safely fitted thanks to the joint made with an 5/8" threaded shaft and quick-fastening belt.
- Sealed high-speed bearings, to prevent the ingress of dust generated during the bevelling or mitering.
- · Highly wear-resistant polyethylene slides.
- · A vacuum cleaner can be easily fitted for dust extraction (ZERO-DUST).
- · Quick and simple grinding wheel change.
- · Chassis with carbon steel sheet.
- · Highly friction-resistant white polyethylene slides
- · Plastic handle.
- · Sealed single-row deep-groove ball bearings.
- $\cdot$  45° x 3/4" (20 mm) grinding wheel included (ref. 16946).
- Compatible with ZERO DUST system by means of a clip for fixing a vacuum cleaner.
- · PVC plastic grinding wheel guard.
- Fixing to angle grinder by means of a 9/16" (14 mm) diameter shaft and quick fastening belt.
- $\cdot$  Compatible with  $\,4\,1/2''\,\&\,5''\cdot\{115\,\&\,125\,\text{mm}\}$  angle grinders with cable or battery up to 850 W. Up to 3 15/16" (100 mm) diameter handle.
- Progressive wear bevelling and mitering is adjustable by 3/8" (10 mm).
- · A damp cloth is recommended for cleaning.
- · Lubrication is not necessary.

	Accessories:
	Fine Grit PRO-EDGER mitering Wheel
	Turbo Twist Coarse Grit PRO-EDGER mitering Wheel
-	Fine Grit PRO-EDGER bevelling Wheel



























#### **TURBO TWIST COARSE GRAIN PRO-EDGER MITERING** WHEEL



#### **FINE GRAIN PRO-EDGER BEVELING WHEEL**





- · Grinding wheel for mitering.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- $\cdot$  45° type tool with 1/32"–3/32"(1–2 mm) edge.
- · Internal diameter: 5/8" (16.1 mm) (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF	$\triangle$	$\varnothing$	$\otimes$		RPM	
45X20 FINE GRAIN PRO-FDGFR	160/6	SUPERPRO	7 11/16"	M16 mm	13/16"	12000	5
MITERING WHEEL	10740	JUFENFINU	J 11/10	14110 111111	20 mm	max.	٠,
45X15 FINE GRAIN PRO-FDGFR	14005	SUPERPRO	3 5 /16"	M16 mm	9/16"	12000	5
MITERING WHEEL	רטיסד	טויבערט	10 / ר	IAITO IIIIII	//10	max.	ر



- · Grinding wheel for mitering.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS between 9000 12000 rpm.
- $\cdot$  The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- · Internal diameter: 5/8" (16.1 mm) (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF	$\triangle$	$\varnothing$	Ø		RPM	
45X15 TURBO TWIST COARSE GRAIN PRO-	1608/	SUPERPRO	Z 5/14"	M16 mm	0/14"	12000	5
EDGER MITERING WHEEL	10704	JUFENFINO	7 7/10	MITO IIIIII	//10	max.	,



- · Grinding wheel for bevelling.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS between 9000 - 12000 rpm.
- · Round finish available on 3/16" and 3/8" (5 and 10 mm)
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF	$\triangle$	$\bigcirc$	$\otimes$	111111	RPM	
R.5 FINE GRAIN PRO-EDGER BEVELING WHEEL	16957	SUPERPRO	2 5/8"	M16 mm	1/4"	12000 max.	5
R.10 FINE GRAIN PRO-EDGER BEVELING WHEEL	16958	SUPERPRO	3"	M16 mm	7/16"	12000 max.	5























Maximum power, the most advanced manual cutter in the market. For intensive cutting of all types of ceramic and porcelain tiles.



	REF	$\triangle$					<b>\</b>			
TZ-850	17956	PREMIUM	√	33 1/16"	24x24"	1/8-7/8"	3307 Lb	49,38 Lb	1	8
TZ-1020	17955	PREMIUM	<b>√</b>	40 3/16"	27 %16X27 %16"	1/8-7/8"	3307 Lb	54,23 Lb	1	8
TZ-1300	17957	PREMIUM	√	51 ¾6"	35 ½6x35 ½6"	1/8-7/8"	3307 Lb	66,14 Lb	1	8
TZ-1550	17958	PREMIUM	√	61 1/16"	43 5/16X43 5/16"	1/8-7/8"	3307 Lb	72,75 Lb	1	8
TZ-1800	17999	PREMIUM	√	70 %"	47 ¼x47 ¼"	1/8-7/8"	3307 Lb	87,52 Lb	1	8

<sup>\*</sup>Some materials with a thickness greater than 9/16" [15 mm] may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.

- Powerful breaking system (up to 3307 lb), operable with just one hand.
- 2 Accurate with soft slider movements.
- Large cutting capacity, up to 7/8" (21mm) thickness. Ideal for large format tiles\*.
- 4 Robust with a foldable structure for high strength and easy transportation.
- Excellent performance breaking system: Clean cuts with soft motion
- · Robust chassis, guides and breaking system.
- Swivel square with central pivot for fast and accurate measurements in angle cutting.
- · Adjustable lateral stop for repetitive cuts.
- · Support base for excellent tile placement.
- · Easy to transport: rubber wheels with bearings and handle.
- · Interchangeable scoring wheels ranging from 0 1/4" 7/8"
- Includes Ø 1/4" (8 mm) SILVER and Ø 7/8" (22 mm) EXTREME scoring wheels. Reinforced textile bag for transport and protection.
- On models 1300/1550/1800: The reinforced textile bag of these models includes 2 built-in wheels.

Accessories
Ref. 18980 Maintenance Kit



































 $( \circ )$ 

## TX-MAX

Professional manual cutter with high-performance multipoint breaker. For professional cutting of all types of ceramic and porcelain tile.





- Highly precise scoring.
  - 2 Entire system highly efficient.
- Reinforced components. Heavy duty.
- 4 High breaking power (2646 lb) MASTER POWER. One-handed operation.
- · Head with extra-long aluminum sliders with "self-lubricating" friction bearings.
- · Portable breaker with aluminum pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- · The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking. Faster use. Increases performance with both thin and thick materials.
- · Injected-aluminum base, reinforced with a central rib, for increased strength.
- · Floating tables and supplementary arms for large-size ceramic tile, increases cutting stability.
- · Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- · Handle with soft grip for better ergonomics and comfort.
- Equipped with 05/16" (8 mm) SILVER and 0 7/8" (22 mm) EXTREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- · Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).

#### Accessories



Ref. 18980 Maintenance Kit




















	REF	$\triangle$					<b>\</b>			
TX-710 MAX	17910	PREMIUM	<b>V</b>	28"	20x20"	1/8-13/16"	2646 Lb	29.3 Lb	1	10
TX-1020 MAX	17916	PREMIUM	<b>√</b>	40 3/16"	27 %16"	1/8-13/16"	2646 Lb	42.8 Lb	1	10
TX-1250 MAX	17922	PREMIUM	<b>V</b>	49 ¾6"	33 1/16"	1/8-13/16"	2646 Lb	57 Lb	1	10

<sup>\*</sup>There are some materials over 9/16" (15 mm) thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product.



XX

## **TR-MAGNET**







- Fast operating system with magnet, for one handed use.
- 2 Reinforced operating material. Increased breaking power.
- Revolving square with central pivot for fast and accurate measurements for cutting angles.
- 4 Floating base with shock absorber for better tile breaking.
- · Solid steel guides, 013/16" (20 mm), chrome-plated and rectified, with anti-corrosion treatment for increased torsional strength.
- · Multipoint breaker 1764 lb (800 kg) of power.
- · Heavy-duty metal arms.
- · Handle reinforced with SOFT-GRIP.
- · Lateral end stop for making repetitive cuts.
- · Base extension for large sizes.
- · Two-layer base with shock-absorbing effect.
- · High-strength aluminum base.
- · Interchangeable scoring wheels from 1/4" (6 mm) to 7/8" (22 mm).
- · With 0 3/8" (10mm) SILVER and 0 7/8" (22mm) EXTREME scoring wheels and carrying case included.

#### Accessories Ref. 18980



Maintenance Kit





















	REF	$\triangle$					<b>&gt;</b>			
TR-600 MAGNET	17907	SUPERPRO	$\checkmark$	24"	17x17"	1/8-%16"	1764 Lb	31 Lb	2	18
TR-710 MAGNET	17908	SUPERPRO	<b>V</b>	28"	20x20"	1/8-9/16"	1764 Lb	34 Lb	1	15































(<u>o</u>

TP-S

Single guide with multipoint separator and angular measurement. Ideal for high quality cutting of ceramic and porcelain tiles.

- Guide system highly resistant to impacts resulting in longer product life.
- 2 Ergonomic handle with incorporated separator for greater speed and ease of use.
- 3 Swivel bracket with central pivot for fast and accurate measurements.
- 4 Long-lasting laser engraved square.
- · Reinforced pressure pad.
- $\cdot$  1/2" [12 mm] reinforced guide. Greater bending resistance and increased precision.
- · Lateral end stop for making repetitive precision cuts.
- · Two-layer base with shock-absorbing effect. Base extension for large sizes. Carrying handle. (TP-66-S and TP-75-S).
- · Assembly designed to be used by pushing the handle.
- · RUBIFLEX bi-material handle.
- · 0 7/8" (22mm) EXTREME scoring wheel included. (Ref. 01901)

#### Accessories Ref. 18980 Maintenance Kit
























	REF	$\triangle$				<b>\</b>			
TP-66 S	12914	SUPERPRO	26"	18 1/8"	3/16-13/16"	2205 Lb	25.4 Lb	1	12
TP-75 S	12928	SUPERPRO	29 ½"	20 %"	3/16-13/16"	2205 Lb	26 Lb	1	12
TP-125 S	11975	SUPERPRO	49 3/16"	33 1/16"	3/16-13/16"	2205 Lb	54 Lb	1	12







XX

Single guide cutter with multipoint separator and angular measurement.

Ideal for high quality cutting of ceramic and porcelain tiles.



- Single guide system highly resistant to impacts. Longer life.
- 2 Separator set with height adjustment. Optimum separation for each thickness.
- 3 Swivel bracket with central pivot for fast and accurate measurement of angular cuts.
- 4 Long-lasting laser engraved square.
- · Reinforced pressure pad 1/2" (12 mm) reinforced guide. Greater bending resistance and increased precision. Lateral end stop for making repetitive precision cuts. Two-layer base with shockabsorbing effect. Base extension for large sizes. Carrying handle. (TP-66-T and TP-75-T).
- · Assembly designed to be used by pulling the handle.
- · RUBIFLEX bi-material handle. Ergonomic and heavy duty construction.
- Cut thickness adjustment system with 3 settings 1/4"-3/8"/ 3/8"-1/2" / 1/2"-3/4" [6-9 mm/9-12 mm/12-20 mm]\*, fast and precise.
- · 0 7/8" (22mm) EXTREME scoring wheel included. (Ref. 01901)

	Accessorie
A-	Ref. 18980



Maintenance Kit

















	REF	$\triangle$				<b>~</b>			
TP-66 T	12917	SUPERPRO	26"	18 1/8"	3/16-13/16"	2.205 Lb	23.15 Lb	1	12
TP-75 T	12929	SUPERPRO	291/2"	20 %"	3/16-13/16"	2.205 Lb	24.25 Lb	1	12
TP-102 T	11903	SUPERPRO	40 3/16"	27 %16"	3/16-13/16"	2.205 Lb	36 Lb	1	-

<sup>\*</sup>Some materials with a thickness greater than 9/16" [15 mm] may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.

































 $\odot$ 

XX

RUBI



Cut & Drill

Authentic & Original: Lightweight and functional with high performance breaker. Ideal for professional cutting of porcelain tiles and intensive cutting of ceramic tiles.





- Progressive breaking system "SMART POWER" adapts to different material hardness.
- Wide base. Greater base surface for higher stability and cutting quality.
- Reinforced components for heavy duty work. High durability.
- 4 Ergonomic handles. Maximum comfort.
- · Bigger reinforced base for a higher comfort and better stability
- · Powerful single point breaker. Up to (1764 lb) 800 kg breaking pressure.
- · Double guide for direct view of scoring/cutting line.
- · Chromed steel guides, rectified and calibrated, with anti-rust treatment.
- · Lateral stop for repetitive straight and 45° cuts.
- · Interchangeable scoring wheels ranging from 01/4" (6mm) to 7/8" (22 mm).
- · Includes Ø 5/16" (8mm) ENDURE and Ø 3/8" (10 mm SILVER) scoring wheels and a transport case with reinforced locks and hinges.

#### Accessories Ref. 18980 Maintenance Kit

















	REF	$\triangle$					<b>\</b>	Å		
TS-43 MAX (GREY)	18972	SUPERPRO	$\checkmark$	17"	12x12"	1/4-9/16"	1764 Lb	19.4 Lb	1	24
TS-66 MAX (GREY)	18974	SUPERPRO	<b>V</b>	26"	18 1/8×18 1/8"	1/4-9/16"	1764 Lb	29.5 Lb	1	20
TS-75 MAX (GREY)	18975	SUPERPRO	<b>V</b>	29 ½"	20 %x20 %"	1/4-9/16"	1764 Lb	33.3 Lb	1	20





## SPEED-MAGNET

For the most demanding tiling projects.

For professional cutting all types of ceramic, porcelain and glass tile.



- Quick speed system with magnet, ideal for one-handed use. Easy and fast to use.
- Great visibility during scoring.
- Reinforced structured elements. High breaking power.
- 4 Aluminum base for robustness. Light and easy to transport.
- · Solid 13/16" (20mm) steel guides. Chromed and rectified with anti-corrosion treatment for greater resistance to twisting.
- · Multipoint breaker 1764 lb (800kg) power.
- · Reinforced SOFT-GRIP handle.
- · Lateral stop for repetitive cuts and 45 degrees square.
- · Interchangeable scoring wheels ranging between 0 1/4" 7/8" [6mm-22mm].
- · Scoring wheel Ø 5/16" (8mm) ENDURE. included.
- · Direct view of scoring and cutting line.
- · 72/92 models:
- -Aluminum lateral support and bigger breaker system.

Accessories:	
Ref. 18980 Maintenance Kit	




















	REF	$\triangle$					<b>&gt;</b>			
SPEED-62 MAGNET WITH CASE	14988	SUPERPRO	$\checkmark$	24"	18"	1/8-1/16"	1764 Lb	25.4 Lb	2	24
SPEED-72 MAGNET WITH CASE	14989	SUPERPRO	<b>V</b>	28"	20"	1/8-%16"	1764 Lb	30 Lb	2	18
SPEED-92 MAGNET WITH CASE	14990	SUPERPRO	<b>√</b>	36"	25"	1/8-9/16"	1764 Lb	37 Lb	2	18

































##

XX



### SPEED-N

The most versatile tile cutter in it's range.

For professional cutting of ceramic tiles and glass and occasionally for porcelain tiles.







- Reinforced structured elements. High breaking power.
- 2 Chromed and rectified steel guides, with anticorrosion treatment. Higher durability.
- 3 Aluminum base for higher robustness.
- 4 Light and easy to transport.
- · With lateral stop for repetitive cuts and 45 degree squares.
- · Interchangeable scoring wheels ranging between 0 1/4" (6mm) to 0 3/8" (10mm).
- · Scoring wheel Ø 5/16 (8 mm) SILVER included.
- · Direct vision of scoring and cutting line.
- · 72/92 models;
- -Aluminum lateral support.

Accessories
Ref. 18980 Maintenance Kit















	REF	$\triangle$							
SPEED 42-N WITHOUT CASE	14949	PRO	-	17"	12x12"	3/16-9/16"	12 Lb	2	64
SPEED-62 N WITH CASE	14985	PRO	√	24"	18x18"	3/16-9/16"	23 Lb	2	24
SPEED-72 N WITH CASE	14986	PRO	√	28"	20x20"	3/16-9/16"	28 Lb	2	18
SPEED-92 N WITH CASE	14987	PRO	√	36"	25x25"	3/16-9/16"	35 Lb	2	18





### **FAST**

Cut & Drill

### Light and versatile cutter.

For professional cutting of ceramic tiles and glass.



- Extruded aluminum base.
- New rigid and stable separator.
- Reinforced 3/4" (18mm) guides for greater resilience.
- 4 Four side brackets for a great additional support.
- · Wider foam base.
- $\cdot$  Chromed steel guides with anti-rust treatment.
- · Lateral stop with 45° square.
- · Base for greater support of the tile.
- · Interchangeable scoring wheels from 01/4"(6mm) to 3/8"
- · 01/4" (6mm) SILVER scoring wheel included.
- · Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.

	Accessories
the same	Ref. 18980 Maintenance Kit

















	REF	$\triangle$				Æ,				
FAST-65	13940	PRO	-	25 %6"	17 ¹¹¼6×17 ¹¹¼6"	1/2"	13.9 Lb	15.4 Lb	4	48
FAST-85	13941	PRO	-	33 1/16"	24x24"	1/2"	16.5 Lb	18.7 Lb	2	32































##



### **STAR PLATINUM**

Light and versatile manual cutter. For cutting ceramic tiles and glass.





- Multipoint breaker with aluminum pressure pad and steel breaker bar for greater robustness and breaking power.
- 2 Closed sliders manufactured in pom and aluminum tool holder, more rigid and stable for easier tile scoring.
- 3 Cast aluminum base, light and strong with side extensions for large pieces.
- 4 Cast aluminum guide supports for greater robustness.
- · Dual guide for greater VISIBILITY of the scoring and cutting line.
- · Solid, chromed, ground and calibrated steel guides with anticorrosion treatment.
- · Side stop with millimetre scale and 45° square.
- · Scoring wheels adaptable to each material to obtain the maximum cutting performance and quality in each case.
- $\cdot$  0 1/4" (6 mm) SILVER scoring wheel included.

Accessories
Ref. 18980 Maintenance Kit
















	REF	$\triangle$						
STAR-51 PLATINUM	15901	PRO	-	20 1/16"	½"	8.29 Lb	6	1
STAR-63 PLATINUM	15902	PRO	-	24 13/16"	1/2"	9.68 Lb	6	1





XX

### **SCORING WHEELS FOR MANUAL CUTTERS**

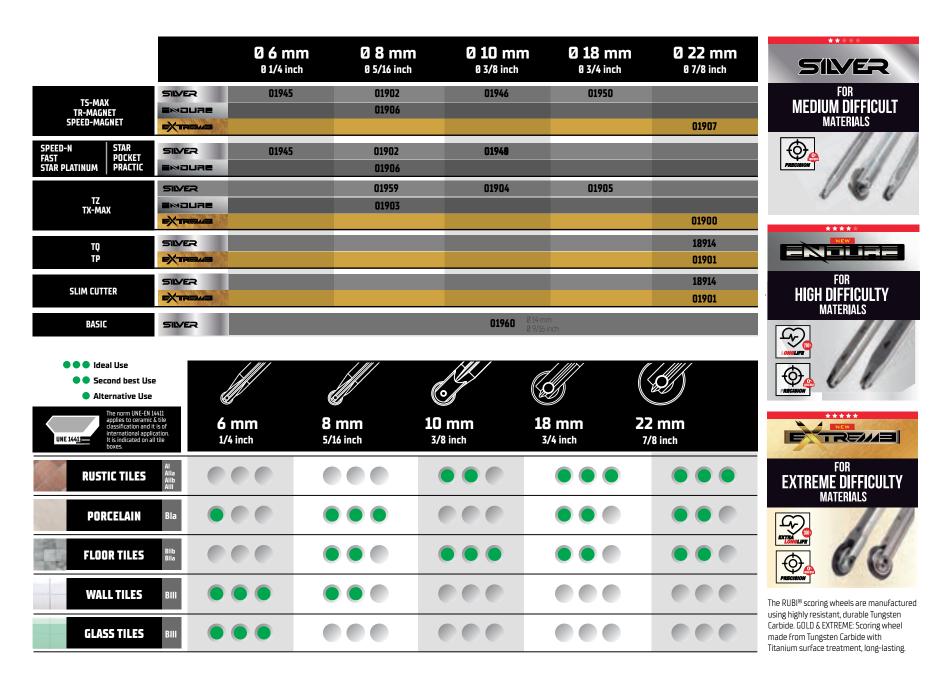







##













· For Wall tiles.

 $( \circ )$ 

##

XX

- Tungsten Carbide scoring wheel of high resistance and durability.
- Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.
- · For TS-MAX, TR-MAGNET, SPEED-MAGNET, SPEED-N, FAST & STAR PLATINUM.

	REF	$\bigcirc$		
SCORING WHEEL 01/4" (6MM)	N1945	PRN	10	4/00
SILVER	01945	PKU	10	4600

## 8mm SILVER Scoring wheel [05/16"]





- · For Wall tiles, Floor tiles and Porcelain tiles.
- Tungsten Carbide scoring wheel of high resistance and durability.
- Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.
- · For TS-MAX, TR-MAGNET, SPEED-MAGNET, SPEED-N, FAST & STAR PLATINUM.

	REF	$\triangle$		
SCORING WHEEL 05/16" (8MM)	N19N2	PRN	10	4600
SILVER	01702	PKU	10	4000

## 8mm ENDURE Scoring wheel [05/16"]



PATENTED



- · For sharp cutting in hard tiles
- · Ideal for rough or structured surfaces.
- · Wheel made of Tungsten Carbide.
- Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.
- For TS-MAX, TR-MAGNET, SPEED-MAGNET, SPEED-N, FAST & STAR PLATINUM.

	REF	$\triangle$	
SCORING WHEEL 05/16" (8MM) ENDURE	01906	SUPERPRO	5

## 10mm SILVER Scoring wheel [03/8"]







- Tungsten Carbide scoring wheel of high resistance and durability.
- Handle made with new high technology RUBI® alloy; maximum precision and resistant to wear.
- · For TS-MAX, TR-MAGNET, SPEED-MAGNET, SPEED-N, FAST & STAR PLATINUM.

	REF	$\triangle$		
SCORING WHEEL 03/8" (10MM) SILVER	01946	PRO	10	4600

## 18mm SILVER Scoring wheel [03/4"]





Cut & Drill



- Tungsten Carbide scoring wheel of high resistance and durability.
- · Patented shaft geometry; maximum precision and minimum vibration.
- $\cdot$  For TS-MAX, TR-MAGNET, SPEED-MAGNET.

	REF	$\triangle$		
SCORING WHEEL 03/4" (18MM) SILVER	01950	PRO	10	3600

## 22mm Scoring wheel (07/8") EXTREME



PATENTED



- · For sharp cutting in hard tiles with rough or structured surfaces.
- Tungsten Carbide scoring wheel with a superficial Titanium treatment.
- Patented geometry shaft, for maximum precision and minimum vibration.
- Patented model for maximum precision and minimum vibration.
- · Extra-long life.
- · For TS-MAX, TR-MAGNET, SPEED-MAGNET

	REF	$\triangle$	
SCORING WHEEL 07/8"(22MM) EXTREME	01907	PREMIUM	5



## 8mm PLUS Scoring wheel [05/16"] ENDURE







PATENTED

- · For sharp cutting in hard tiles
- · Ideal for rough or structured surfaces.
- · Wheel made of Tungsten Carbide.
- Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.
- · For TZ and TX-Max Models.

wheel [03/4"]

	REF	$\triangle$	
8MM PLUS SCORING WHEEL (05/16") ENDURE	01903	SUPERPRO	5

**18mm PLUS SILVER Scoring** 

## 8MM PLUS SILVER SCORING WHEEL (05/16")



- · For wall tiles, floor tiles and porcelain tiles.
- Tungsten carbide scoring wheel of high resistance and duration.
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.
- · For TZ and TX-Max Models.

	REF	$\triangle$		
8MM PLUS SILVER SCORING WHEEL (05/16")	01959	PRO	10	3600

## 10mm PLUS SILVER Scoring wheel (03/8")

· Tungsten Carbide scoring wheel of high resistance and

· Shaft made with a patented geometry for a maximum

01904

· For Floor tiles.

10MM PLUS SILVER SCORING

WHEEL [03/8"]

precision and minimum vibration.
• For TZ and TX-Max Models.





10



(o)







































- Tungsten Carbide scoring wheel with a superficial Titanium treatment.
- · Mounted on bearing. Enhanced smooth user perception.
- · Extra-long life.
- · For TZ and TX-Max Models.

	REF	$\triangle$		
22MM SCORING WHEEL PLUS EXTREME (0 7/8")	01900	PREMIUM	5	

- For rough and difficult to cut tiles.
- Tungsten Carbide scoring wheel of high resistance and duration.
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.
- · For TZ and TX-Max Models.

	REF	$\triangle$		
18MM PLUS SILVER SCORING WHEEL (03/4")	01905	PRO	10	3600



##

XX

22mm SILVER Scoring wheel (07/8") TP/TQ



22mm Scoring Wheel Plus Extreme (0 7/8") TP/TQ




### **Scoring wheel set 1**









· Scoring wheel guide made for Tungsten Carbide.

	REF	$\triangle$	
22MM SCORING WHEEL (07/8") SILVER TP/	1001/	DDO	10
TQ & SLIM	18914	PRO	10



- · Exclusive for TP/TQ & SLIM cutters.
- · For sharp cuttings in hard ceramic and porcelain tiles.
- Tungsten Carbide scoring wheel with a superficial Titanium treatment.
- · Mounted on bearing. Enhanced smooth user preception.
- · Extra-long life.

	REF	$\triangle$	
22MM SCORING WHEEL PLUS EXTREME (0	N19N1	PREMILIM	5
7/8") TP/TQ & SLIM	01701	PREMIUM	ر

- · For TS-MAX, TR-MAGNET, TF-MAX, SPEED-MAGNET, SPEED-N, FAST, STAR-MAX, STAR, POCKET & PRACTIC ranges, includes 1 01/4" (6mm) SILVER scoring wheels and 1 03/8" (10mm) SILVER scoring wheel.
- · In plastic box with transparent cover.
- · Supplied in blister

	REF	$\triangle$		
SCORING WHEEL SET 1	01995	PRO	5	450


### Scoring wheel set 2





- · For TS-MAX, TR-MAGNET, TF-MAX & SPEED-MAGNET models, includes 1 scoring wheel of 01/4" (6mm), 05/16" (8mm), 03/8" (10mm), 07/8" (22mm) (2 units) SILVER.
- · In plastic box with transparent cover.
- · Supplied in blister.

	REF	$\triangle$		
SCORING WHEEL SET 2	01969	PRO	5	450

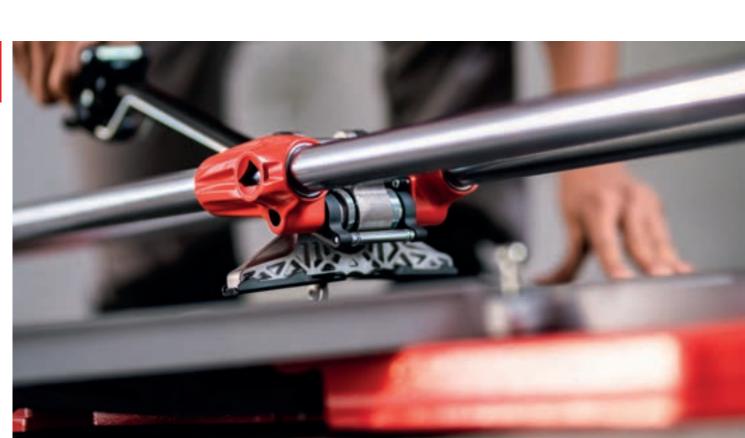































- $\cdot$  Switch with safety lock. Prevents unintentional start-up. Electrical cable with RCD.
- · Bi-material additional grip. Principally for miter cuts.
- · Compatible with diamond blades of 5" (125 mm) or 4–1/2" (115 mm) diameter. (Suitable for blades with reinforcement plate, TVA type).
- · Cast aluminum blade protector with transparent polycarbonate cover with quick opening and closing system. Facilitates blade change and minimises the projection of particles and water.
- · Includes TCR-125 SUPERPRO 5" blade (dry cutting), transport case and accessories. facilitates transport and handling.

	REF	$\bigcirc$		RPM	5		➾	$\varnothing$	$\otimes$			
TC-125 USA	51957	SUPERPRO	$\sqrt{}$	13800	110-130V 50-60Hz.	13/16-1"	9/16-11/16"	4 ½-5"	7/8"	129 <sup>15</sup> / <sub>16</sub> x94 ½x81 ½"	31 Lb	1

- · Includes:
- Suction Cups x2 (Ref.18834)
- Fixing C-Clamp x2 (Ref.52220)
- Cutter Guides x3 (Ref.18913)
- Carrying Bag. (Ref.18230)

	REF	$\triangle$		
GUIDES TC-125 USA PACK 2	51969	SUPERPRO	$\checkmark$	1





### **SLAB CUTTER G3**

Cut & Drill

Manual cutting system with connectable guides. For manual cutting of large porcelain tiles.



















The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 3/8" (10 mm) to 9/16" (15 mm).

- System with movable suction cups integrated in the guides. Special grey rubber suction cups for rough surfaces that won't leave marks on the tile.
- Carriage with lever mechanism for perfect scoring. Extreme roller guide.
- Highly reinforced guides. Easily interconnected by means of an adjustable lever mechanism.
- 4 Transport bag with padded handles and pockets for accessories.
- Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile, thus reducing the risk of cracking. 2-in-1 nippers and breaker.
- 0 7/8" (22 mm) RUBI EXTREME roller guide made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
- Each set contains: Three 44 1/8" (112 cm) guides, 1 marker carriage with 7/8" (22 mm) roller guide, 1 set of nippers and 6 suction cups.
- Transport bag with padded handles and pockets for accessories.

	Accessories
54918	Slab breaker Nippers
16908	SLAB Cutter G3 Supplement Guide and Suction Cups



XX

### **SLIM CUTTER PLUS**

Cut & Drill

Manual cutting system with connectable guides.

For manual cutting of large porcelain tiles with thicknesses between 1/8" and 3/8".



















The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 3/8" (10 mm) to 9/16" (15 mm).

- 43 5/16" (110 cm) long extruded aluminum guides which can be connected together.
  - 2 126" (320 cm) cutting capacity (extendable according to need by adding extra guides, Ref.18913).
  - 3 natural rubber suction cups suitable for smooth and rough surfaces for better fixing of the guides to the tile.
  - Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile, thus reducing the risk of cracking. 2-in-1 nippers and breaker.
  - $\cdot$  Recommended thicknesses between 1/8" and 3/8" (3 10 mm).
  - $\cdot$  More ergonomic scoring carriage with a score increase of 30 %.
  - · 0 7/8" (22 mm) RUBI EXTREME scoring wheel made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
  - Includes practical transport bag manufactured in reinforced nylon with handles and shoulder strap. Includes 4 interior compartments for accessories.
  - Each set contains: Three 43 5/16" (110 cm) guides. 1 scoring carriage with 7/8" (22 mm). Extreme scoring wheel, 1 set of nippers, 3 suction cups and 1 Allen key.

	Accessories .
18917	Slim Separator
54918	Slab breaker Nippers
18913	Slim System Cutter Guide 43 5/16" (110 cm).
18879	Head Set Slim Cutter
18834	Suction pad slim cutter































· Aluminum guide- 43 5/16" (110 cm).

	REF	$\triangle$	Å	
SLIM SYSTEM CUTTER GUIDE 110CM.	18913	SUPERPRO	3.7 Lb	1

## SLAB CUTTER G3 SUPPLEMENT GUIDE



- · Extruded aluminum guide with extra 44 1/8" (112 cm).
- · Includes two suction cups integrated into the guide.

	REF	$\triangle$	
SLAB CUTTER G3 SUPPLEMENT GUIDE AND	16908	PREMIUM	1
SUCTION CUPS	10700	PREMIUM	1

#### **Head Set Slim Cutter**






· Replacement of the slim cutter.

	REF	$\triangle$	
HEAD SET SLIM CUTTER	18879	SUPERPRO	1

### **SLAB BREAKER NIPPERS**







- $\cdot$  High breaking power for tiles from 1/8" and 3/8" (3 and 10 mm) thick.
- Reinforced nippers designed for greater comfort and durability.
- Can be used as nippers for thinner tiles and as a breaker if the thickness or hardness of the material requires it. 2-in-1 nippers and breaker.

	REF	$\triangle$	
SLAB BREAKER PLIERS	54918	SUPERPRO	1

### **Suction cup for Slim Cutter**





· Replacement suction cup for Slim Cutter and TC125 guides.

Replacement Saction cap for Sil	iiii caccei	una reizo	Salacs.
	REF	$\triangle$	
SUCTION CUP FOR SLUM CUTTER.	18834	SUPERPRO	1

#### Slab Breaker Plus





- $\cdot$  Auxiliary breaker for the cut of slim porcelain slabs or large tiles.
- $\cdot$  To separate thicknesses of 1/4" 9/16" [6 -15 mm].
- · Soft-grip handle for a better comfort and ergonomic.
- With width adjustment system, to achieve an equal, uniform and symmetric distribution of breaking forces when cutting narrow Straps.
- · Rubber pressure pad for greater control and more precise separation.

	REF	$\triangle$	
SLAB BREAKER PLUS	18917	SUPERPRO	1

 $\odot$ 

XX

### **SLAB TRANS HEAVY DUTY N**

Set Set

Fully adjustable framework for handling large ceramic/porcelain/natural stone slabs. Especially suited for handling thicker pieces.



- Reinforced aluminum profile joined by a system of sliders. Greater structural strength.
- 2 Includes 2 perpendicular aluminum guides, for greater stiffness.
- Equipped with four retractable and removable Soft-Grip handles to adapt to every situation during installation. Six light colored vacuum suction cups that does not leave marks on the tile. Increased load capacity.
- Fast and easy to assemble and disassemble. Easy fix system.
- · Black anodized finish.
- · Each guide can be used independently.
- · Maximum load capacity: 375 lb (170 kg).
- · Maximum handling size: 11' 10" x 5' 3" (360 x 160 cm).
- · Unitary box with RUBI's flexography and full-colour label.

						п	
29	ы	n	۹,	0		м	

Ref. 18979

Vacuum suction pad SLAB TRANS HEAVY DUTY N

Ref. 18934

Slab Trolley












	REF	$\triangle$				
SLAB TRANS HEAVY DUTY N	18982	PREMIUM	149 5/8x66 15/16x9 5/16"	78 Lb	1	1

Additional vacuum suction cups available can be attached to the system but it does not increase the maximum load capacity.

Old Ref. 18936



































### **SLIM EASY TRANS PLUS**

For transporting of large-format sheet tiles.



- · Includes 2 retractable and adjustable guides of 47" 126" (170 to 320 cm) of reinforced aluminum and six 8" (20 cm) suction cups (ref. 18827) with high load capacity. Provide added safety and reliability.
- The optimal recommended gripping distance is 27 9/16" (700 mm) distance between handles.
- · The soft-grip handles can slide and be removed through the top slot of the guides.
- · Multiple position settings for the suction cups.
- · Each guide can be worked with individually.
- · Maximum load capacity: 176 lb (80 kg).
- For pieces up to 126" (3.2 m).



Ref. 18819

Slim EASY TRANS / SLIM EASY TRANS PLUS supplementary guide set

Ref. 21955

supplementary vacuum suction cup for guide set

Vacuum suction pad SLAB TRANS HEAVY DUTY N













	REF	$\triangle$				
SLIM EASY TRANS PLUS	18976	SUPERPRO	651 3/16x100x89 3/4"	53 Lb	1	1
שבויו באשר האאוט רבטש	18976	JUFLINFING	1654x254x228 cm	24 kg	1	1





XX

### **SLIM EASY TRANS**

3 Set

To transport large porcelain slabs.

- · Includes two retracting guides adjustable from 63"–126" (160 to 320 cm) and 10 suction cups for securing rough and smooth surfaces (Ref.66929).
- · Maximum load of the unit: 132 lb(60 kg).
- · For pieces up to 118" (3 m).
- · Accessory: Ref. 18819.

#### Accessories

Ref. 18819

Slim EASY TRANS / SLIM EASY TRANS PLUS supplementary guide set













	REF	$\triangle$			
SLIM EASY TRANS	18910	SUPERPRO	36.6 Lb 16.6 kg	1	12

































### **SLAB TRANS MINI**

For transporting ceramic sheets and large-format tiles with a maximum recommended size of 60x60" (150 x 150 cm).



2 Retractable aluminum guide. Allows us to handle and transport tiles between 39 3/8" (100 cm) and 83" (210 cm) in size. Especially recommended for formats of up to 60x60" (150 x 150 cm), 1/4" or 5/16" (6 or 8 mm) thick, used diagonally.

weight to the tile conveyor assembly when

I Ideal for medium formats. It adds less

transporting medium-sized formats.

- Highly reinforced, adjustable and removable soft-grip handles. With an anti-twist and soft-grip system which ensures a better grip of the assembly.
- 2 interchangeable 08" (20 cm) suction cups, can be placed at any point on the guide.
- · Suction cups with a safety indicator.
- · Each suction cup, of 08" (20 cm) in diameter and with a highload capacity, has an indicator that warns us in the event of a loss of suction.
- · The suction cups have a protector to prevent damage during transport.

#### Accessories

Ref. 16909

Slab trans mini support for table













SLAB TRANS MINI 18983 SUPERPRO 1



REF






XX











- · With the supplementary guide set we increase the maximum load capacity to 265 lb (120kg).
- · Increases the rigidity of the unit.
- · Facilitates handling of the pieces.
- · Fast and easy to assemble and disassemble.
- · Black anodized finish.

	REF	$\triangle$		
SLIM EASYTRANS / SLIM EASYTRANS PLUS SUPPLEMENTARY GUIDE SET	18819	SUPER PRO	1	1



· The suction cup addition is an accessory compatible only with SLAB TRANS HEAVY DUTY N (Ref. 18982) transporter. The suction cup can be fixed to any type of surface without leaving a mark on the part. Its use allows the suction cups to be replaced while maintaining the original maximum load capacity of the transporter at all times.

	REF	$\triangle$		
VACUUM SUCTION PAD SLAB TRANS HEAVY DUTY N	18979	PREMIUM	1	1


#### **SUPPLEMENTARY VACUUM SUCTION CUP FOR GUIDE** SET



#### **SLAB TRANS MINI SUPPORT FOR TABLE**







· Provides rigidity in the transport of very thin workpieces.

· Facilitates the transport of cut workpieces.

	REF	$\triangle$	
SUPPLEMENTARY VACUUM	21055	PREMIUM	1
SUCTION CUP FOR GUIDE SET	21900	PREMIUM	1



 $\cdot$  Solely for use with the SLAB TRANS MINI and the SLAB TABLE.

· Helps to place the workpiece on the SLAB TABLE in the back buttering position without having to remove the conveyor.

	REF	$\triangle$	
SLAB TRANS MINI SUPPORT FOR TABLE	16909	SUPERPRO	1



























· Transport system and manoeuvre for large format tiles.

 $\cdot$  Exclusive to the Slab trans HD and Slim easy trans systems.

· Easy and guick to assemble and disassemble. Easy fix connection system.

· Maximum load capacity: 309 lb (140 kg) (including material and trans system).

· Extendable support arm for greater ergonomics when loading and unloading pieces on the

18934 PREMIUM 33 Lb

· Especially suitable for thicker/heavier slabs.

· Ultra light and compact.

SLAB TROLLEY







 $\odot$ 































- · Workbench to support the cutting and preparation of large format materials using the tools of the Slab system range.
- Extra-reinforced bars thus increasing the rigidity of the workbench.
- The structure of the table together with the levelling feet achieves a greater stability of the set.
- · Assembly and disassembly fast and easy. Easy fix connection system (hammerhead screws).
- · Folding legs. Equipped with security system against involuntary closing.
- · Dimensions in working position: 71"x41"x28" [180x104x70 mm].
- · Dimensions in transport position: 71"x41"x8" (180x104x20mm).
- · Working height: 27 4/7" (70 cm).
- · Maximum load capacity: 551 lb (250 kg).
- · Recommended using two Slab Table for porcelain panels.

	REF	$\triangle$		*		
SLAB TABLE	18935	PREMIUM	76.1 Lb	79 Lb	1	9





#### PATENTED



- ·Transport system for large format tiles. Can be used with SLAB Trans Heavy Duty or SLIM Easy Trans.
- · It can transport formats up to 126"x63" (320 cm x 160 cm).
- · Large load capacity of 728 Lb (330 kg).
- · Max load capacity of the hooks =220 Lb (100 kg).
- · Not compatible with supplementary guide set, they must be removed before hanging the carrier.

	REF	$\triangle$		
SLAB A-FRAME	17900	SUPERPRO	1	5

#### **PATENTED**



- · Work bench for cutting and handling large-format ceramic sheets, specifically designed for the SLAB range of tools.
- · Thanks to the shape of the legs and its structure, the table is very stable and sturdy even in its widest position. The adjustable feet ensure this stability, even on uneven floors.
- Dimensions in working position: The table is extendable from 43 3/10" to 59 5/8" (1100 to 1515 mm), which allows you to handle the widest formats. Its length is 71" [1800 mm].
- · Its folding legs and two side wheels make it easy to transport and store.
- · Double working height: 27 9/16" and 33 1/6" (70 and 84 cm), which means it can be adapted to different needs, allowing all types of work to be carried out.
- · Maximum load capacity: 573 lb (260 kg). Even the largest tiles can be loaded.
- · Thanks to its two movable bars and wide T-shaped profiles, you can have a support surface that allows you to work as if on a workbench for the use of smaller tools, such as hand-held cutters, for example.

	REF	$\triangle$	Å	*		
SLAB VERSA-TILE TABLE	18984	PREMIUM	76.1 Lb	79 Lb	1	9

























































- Accessory for the SLAB VERSA-TILE TABLE, it allows you to extend the table up to 118" [3 m] while maintaining its basic features.
- · Also compatible with the SLAB TABLE.

	REF	$\triangle$	
SLAB TABLE LENGTHEN ACCESSORY	21931	PREMIUM	1




- · This accessory makes possible to lift the workpiece 1 3/4" (4.5 cm) from the SLAB TABLE/ SLAB VERSA-TILE TABLE profiles.


	REF	$\triangle$	
SLAB TABLE TILE LIFTING	21075	PRFMIIIM	1
ACCESORY (C-15)	21773	PKLIMIUM	1

#### **ERGO TILE BEATER**









- · With a bi-material handle for maximum comfort and ergonomics.
- · Metal plate for complete rigidity and long durability, reinforced with rubber to avoid damaging the ceramic tiles.
- · Exact, balanced weight.

	REF	$\triangle$	
ERGO TILE BEATER	28900	PREMIUM	1

### Tile beating block





- · Helps colaps and settle thin set ridges under tile.
- · Waterproof and high wear resistance wood.
- · Perfect flatness.
- · Dimensions: 15 3/4" x 5 3/4" (40x14,5 cm.)
- · With white natural rubber sheet to prevent damage to the tile.

	REF	$\triangle$	
TILE BEATING BLOCK 40 X 14,5 CM. WITH	72980	SUPERPRO	1
RUBBER	72700	JUPERPRU	1

### **RUBI TRILLER**

3

Compact manual vibrator.
Especially designed for vibrating large format tiles.



- Compact manual vibrator especially designed for vibrating large format tiles.
- Expels the air trapped under the tile and maximises the adhesive coverage. ( Do not use for a long period of time on the same tile to prevent the adhesive escaping.)
- · Suitable for use on floor and wall tiles.
- · Compact and light design weighing just 11 Lb (4.8 kg) to facilitate work on walls.
- · Floating carbon steel chassis with vibration reduction system for greater user comfort.
- · Easy to change, non-marking contact plate.
- · Easy to operate tool with ergonomic double grip.
- · Non-adjustable vibration frequency.
- · Folded 1/16" (1.5 mm) steel sheet chassis, powder painted in red.
- · Vibration plate made of PUR plastic, non-marking and easy to change.





































- · Body made of highly resistant aluminum. With ergonomic handle for greater comfort.
- · Maximum load of capacity: 220lbs (100 kg).

	REF	$\bigcirc$		
TRIPLE SUCTION CUP	66904	PRO	1	80

## GSC-200 VACUUM SUCTION CUP 08"







- Suction cup for the manipulation of large ceramic tiles and heavy porcelain slabs.
- · Adapts to any surface without leaving any marks.
- · Fixing by vacuum manual pump.
- · Load loss indicator (red mark).
- · Pressure relese mechanism.
- · Maximum load capacity: 243 lb (110 kg).
- · High resistanceplastic body.

	REF	$\triangle$	*	
GSC-200 VACUUM SUCTION	21951	PREMIUM	3.3 Lb	1
CUP 08"	21931	PKEMIUM	1.5 kg	1

## SUCTION CUP WITH VACUUM PUMP 08"







- · Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 243 lb (110kg).

	REF	$\triangle$	
SUCTION CUP WITH VACUUM PUMP 08"	18919	PREMIUM	1

## RM ROUGH SURFACE SUCTION CUP







- · Injected polycarbonate body. Very light.
- Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity: 55 lb (25 kg).
- · Suction cup diameter: 4 3/4" (120 mm).

		,		
		REF	$\triangle$	
RM ROUGH SURFACE SUCTION CUPS		66929	SUPERPRO	1

## RM ROUGH SURFACE DOUBLE SUCTION CUP



- Double suction cup for handling tiles with rough and/or slightly structured surfaces.
- · Injected polycarbonate body. Very light.
- Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity: 121lb (55 kg).
- · Suction cup diameter: 4 3/4" (120 mm).

		,		
		REF	$\triangle$	
RM ROUGH SURFACE DOUBLE SUCTION	l CUP	66952	SUPERPRO	1

#### **TILE GAP CLOSER**





- · For a precise and easy adjustment of the gap between tiles during floor or wall tiling.
- · Large diameter suction cups 5 7/8" (150 mm) for any kind of tile surface (flat, rough, structured, etc.)
- For lateral displacement of tiles and gap reduction between 0–19/16" (0 40 mm).
- Enables to equal the level of the tiles between 0- 3/4" (0 20 mm).
- · Maximum lifting capacity up to 100 Kg (220 lbs).

	REF	$\triangle$			*	
TILE GAP	60926	PRO	18 7/8"	7.96 Lb	8.47 Lb	
CLOSER	00720	PRU	48X15X12 cm	3.61 kg	3.84 kg	

 $( \circ )$ 

XX

### **RUBIMIX-8 EASY PRO**

Multipurpose electric mixer, suitable for cementitious adhesives, resins, paint, and other materials. Facilitates a homogeneous mixing of materials, avoiding the formation of bubbles and/or lumps.





- 1400 W Electric Motor
- 2 Mixing paddles connection through M14 thread.
- 3 Greater electrical SAFETY thanks to double isolation.
- 4 EASY and INTUITIVE use. ATTRACTIVE and FUNCTIONAL design.
- · Ergonomic bi-material handle with improved grip that provides greater comfort & stability.
- · chassis in technical plastic, light & resistant. maximum reliability & durability.
- · anti-ignition security system. Prevents inadvertent start-up.
- · Includes 04" 3/4 (0120 mm) red triple helix split mixing paddle (M14 thread continuous full rod) for mortar and cementitious adhesives.
- · Direct access to engines brushes for a fast and easy maintenance.
- $\cdot$  Spare brushes and 3/4" & 7/8" (19 & 22 mm) keys included.
- · Compatible with drill holder and RUBI mixing paddles range.













































## **RUBIMIX-9 N**



Versatility by changing the mixing paddle. For cementitious adhesives, resins, paints and other materials.





- Higher mixing performance, thanks to a more efficient torque.
- 2 2 speed gearbox and progressive switch (R.P.M. regulation) to optimize the mixing of each material.
- **3** Quick and easy to change the brushes. High comfort.
- 4 Safety lock to prevent unexpected start.
- · Power: 1200 W.
- · Double insulation.
- · Direct connection M14 thread.
- · Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). 0 maximum paddle: 5" 1/2 (140 mm).
- $\cdot$  0 4 3/4" (120 mm.) mixing paddle included.

















XX

### **RUBIMIX-9 SUPERTORQUE**

paints and other materials Facilitates homogeneous mixing of the









- 2 Progressive regulator integrated in the handle's side (rpm control) to OPTIMISE the mixing of each material.
- 3 Equipped with a mechanical 2 SPEED gearbox (450/780 rpm).
- Better electrical SAFETY thanks to its double insulation.
- · Attractive and functional design.
- · Connection to mixing paddles with M14 thread.
- · Double handle with bi-material grip providing better ergonomics, comfort and stability.
- · Chassis in technical, light, and strong plastic. maximum reliability and durability.
- · Safety on button. Prevents unintentional start-up.
- · Smooth start system.
- · Direct access to the motor's brush housing for quick and easy maintenance.
- · Includes mixing paddle with 3 helixes of 5 1/2" [140 mm] diameter for mortars and cementitious adhesives.
- · Option to couple a Rubi fast-in adapter for paddles (NOT included).
- · Includes brushes and 3/4" and 7/8" (19 and 22 mm) spanners.
- · Compatible with chucks and range of mixing paddles RUBI.













































## Mixing Paddle FAST-IN









 $\odot$ 

























- · Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.

· To mix cement mortars.

- · Less vibrations. Greater comfort.
- · Fast connection without tools FAST-IN
- · Compatible with RUBIMIX-9 N PLUS, RUBIMIX E-10 ENERGY, RUBIMIX-16 ERGOMAX or FAST-IN (Ref. 76907) Adaptable to any mixer with M14x2 connection.

	REF	$\triangle$	*****	<u> </u>	Į E		
MIXER PADDLE	74.07.1	SUPERPRO	77_/// lb	71 E /0"	<b>/</b> ."	4	
M-100-FI 3H	70741	JUPERPRU	33-44 LU	21 3/ 0	4	6	
MIXER PADDLE	74047	SUPERPRO	77_EE   b	74"	4 3/4"	,	
M-120-FI 3H	/0942	SUPERPRU	23-22 FD	24	4 5/4	2	
MIXER PADDLE	7/0/7	SUPERPRO	FF 0016	74"	5 1/2"	٦ .	84
M-140-FI 3H	/0745	SUPERPRU	22-88 FD	24	3 1/2	2	84

### Adapter FAST-IN thread







- · Adapter for use of the FAST-IN mixer paddles.
- · Transforms threaded connection M14x2 to quick connection system FAST-IN.
- · Adaptable to any mixer with M14x2 thread.

	REF	$\triangle$	
FAST-IN ADAPTER	76907	SUPERPRO	1

### Mortar mixing paddle Thread M14 3HELIX





- · To mix cement mortars
- · Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- · M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX-9/9 PLUS and other brands.

	REF	$\triangle$	*****	Į.	Ē		
MORTAR MIXER PADDLE M-100-R 3H	25978	PRO	33-44 Lb	21 5/8"	4"	2	
MORTAR MIXER PADDLE M-120-R 3H	25979	PRO	33-55 Lb	24"	4 3/4"	6	
MORTAR MIXER PADDLE M-120-R 3H LONG	26953	PRO	33-55 Lb	24"	4 3/4"	6	
MORTAR MIXER PADDLE M-140-R 3H	76919	PRO	55-88 Lb	24"	5 1/2"	2	84
MORTAR MIXER PADDLE M-160-R 3H	76940	PRO	66-132 Lb	24"	6"	2	84

### Eggbeater





- · To mix thinset, mortar, grout and other setting materials.
- · Reduces the creation of bubbles.
- · White zinc coating for rust protection.
- · 27" hexagonal shaft...

	REF	$\triangle$	Ĭ	<b>E</b>	
EGGBEATER	76908	PRO	5"	27"	6



### Mortar mixing paddle -**Hexagonal** rod







- · To mix mortar and other cement based adhesives.
- · Made of steel with epoxy coating.
- · Hexagonal shaft.

	REF	$\triangle$	E	<b>E</b>	*****	
MORTAR MIXER PADDLE M-100-L	24957	PRO	4"	30"	33-44 Lb	2

## EASY GRES drill bits 07/32" to 1/2" (6-12 mm.)







- · Diamond drill bits to be used with electric drill without hammer.
- The quality of the diamond allows the drilling of ceramics, porcelain, granite, marble and glass.
- · Ideal to install bathroom accessories and any type of decorative accessories over ceramic surfaces.
- They must always be used with the EASY GRES guide which allows their adequate refrigeration ensuring a high accuracy and good results.
- · Average life between 5 and 10 holes depending on the material.
- · Body made of steel and bit made of electrodeposited diamond.
- Lateral opening to improve cooling of the drill bit and to allow the elimination of solid waste produced after the drilling of the hole.
- Recommended speed of use between 400 and 1000 r.p.m. depending of the material to be drilled.
- To achieve a better finish and a longer life of the drill bit, it's important to observe the adequate speed of use and to apply a moderate pressure during the drilling. Supplied in blister.

	REF	$\triangle$	RPM		
EASY GRES DRILL BIT 7/32" (6 MM.)	04922	PRO	1000 max.	1"	10
EASY GRES DRILL BIT 1/4" (6.5 MM.)	05913	PRO	1000 max.	1"	10
EASY GRES DRILL BIT 5/16" (8 MM.)	04923	PRO	1000 max.	1"	10
EASY GRES DRILL BIT 3/8" (10 MM.)	05914	PRO	1000 max.	1"	10
EASY GRES DRILL BIT 1/2" (12 MM.)	04921	PRO	1000 max.	1"	10
EASY GRES DRILL BIT 7/32" SET	04927	PRO	1000 max.	1"	10
EASY GRES DRILL BIT 5/16" SET	04928	PRO	1000 max.	1"	10
EASY GRES DRILL BIT 3/8" SET	04929	PRO	1000 max.	1"	10
EASY GRES DRILL BIT 1/4" AND 3/8" SET	04909	PRO	1000 max.	1"	10

#### **EASY GRES drill bits 0 3/4" - 4 3/4"**



- · Electroplated diamond drills for use with electric drill without hammer.
- The quality of the diamond permits drilling ceramic, porcelain, granite, marble and glass.
- · Always use water-cooled.
- The use of the MULTIDRILL guide (Ref. 50944) and the water tank (Ref. 50947) to cool and prevent movement of the drill bit during drilling getting good finishes.
- The working speed varies between 400 and 1000 r.p.m., depending on the material to be drilled.
- · Average life of 10 holes, depending on the material. Body in steel and electroplated diamond tips.
- · Lateral opening for improved cooling and allow the removal of solid waste after each hole.
- · For a better finishing and longer bit life, it is important to respect the right speed and moderate pressure during drilling.
- · Supplied in blister.
- · Certified for Dekton.

	REF	$\triangle$	RPM	+	
EASY GRES DRILL BIT 3/4" (20 MM.)	05941	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 1 1/8" (28 MM.)	05942	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 1 3/8" (35 MM.)	05943	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 1 5/8" (40 MM.)	05944	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 1 3/4" [43 MM.]	05965	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 2" (50 MM.)	05946	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 2 1/4" (55 MM.)	05967	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 2 1/2" (65 MM.)	05969	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 2 11/16" (68 MM.)	05978	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 3" (75 MM.)	05979	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 4" (100 MM.)	05981	PRO	500 max.	1 1/16"	1
EASY GRES DRILL BIT 4 3/4" (120 MM.)	05982	PRO	500 max.	1 1/16"	1





































- · MULTIDRILL guide with suitcase.
- · Dry cutting diamond drill bits:
- · 01 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm),2"(50mm)&2 11/16"(68mm)..

	REF		RPM	5,1	
KIT 5 BITS DRYGRES	05996	SUPERPRO 14	000 max.	1 7/16"	1

#### **KIT EASY GRES PLUS**



Cut & Drill



- · The kit includes:
- · MULTIDRILL guide.
- · Water tank and hose.
- EASY GRES drills 0 3/4", 1 1/8", 1 3/8", 1 3/4", 2", 2 1/2" and 3" (20, 28, 35, 43, 50, 65 and 75 mm.) and case.

	REF	$\triangle$	RPM			
KIT EASY GRES PLUS	51919	PRO	500 max.	1 1/16"	1	48



##

İ

XX



- $\cdot$  For dry drilling in ceramic, porcelain, natural stone and other materials.
- Maximum operating speed 14,000 r.p.m. 5/8" connection. Usable with grinder. Supplied in blister.
- · Certified for Dekton.

Certified for Dektori.				
	REF		5	
DRYGRES DRILL BIT 0 1/4" (6 MM.)	05993	SUPERPRO 14000 max.	1 7/16"	1
DRYGRES DRILL BIT Ø 5/16" (8 MM.)	05932	SUPERPRO 14000 max.	1 7/16"	1
DRYGRES DRILL BIT Ø 3/8" (10 MM.)	05901	SUPERPRO 14000 max.	1 7/16"	1
DRYGRES DRILL BIT Ø 3/4" (20 MM.)	05934	SUPERPRO 14000 max.	1 7/16"	1
DRYGRES DRILL BIT Ø 1 1/8" (28 MM.)	05902	SUPERPRO 14000 max.	1 7/16"	1
DRYGRES DRILL BIT Ø 1 3/8" (35 MM.)	05987	SUPERPRO 14000 max.	1 7/16"	1
DRYGRES DRILL BIT Ø 1 3/4" [43 MM.]	05936	SUPERPRO 14000 max.	1 7/16"	1
DRYGRES DRILL BIT Ø 2" (50 MM.)	05903	SUPERPRO 14000 max.	1 7/16"	1
DRYGRES DRILL BIT Ø 2 1/2" (65 MM.)	05937	SUPERPRO 14000 max.	1 7/16"	1
DRYGRES DRILL BIT Ø 3" (75 MM.)	05938	SUPERPRO 14000 max.	1 7/16"	1

Cut & Drill

· Kit includes: · MULTIDRILL Guide. · Tank and hose.

· Case.

KIT FORAGRES

(0 20, 28, 35, 43, 50, 68 mm.).











(o)




















- · Kit composed of:

- · Certified for Dekton

	REF	$\triangle$	RPM	
KIT DRYGRES 4DRILL	05968	SUPERPRO	1000 min.	1



Cut & Drill

- · To drill Floor tiles, Porcelain tiles, Granite and Marble.
- · Always use cooled with water and non-hammer electric
- $\cdot$  0 1 5/8" (40 mm.) drill bit, designed for housing of toilet flushing mechanisms. Supplied in blister.

	REF	$\triangle$	RPM	-	
FORAGRES DRILL BIT 3/4" (20 MM.)	04970	SUPERPRO	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 1/8" (28 MM.)	04971	SUPERPRO	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 3/8" (35 MM.)	04972	SUPERPRO	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 5/8" (40 MM.)	04963	SUPERPRO	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 3/4" (43 MM.)	04981	SUPERPRO	900 max.	1 3/16"	1
FORAGRES DRILL BIT 2" (50 MM.)	04973	SUPERPRO	900 max.	1 3/16"	1
FORAGRES DRILL BIT 2 1/2" (65 MM.)	04974	SUPERPRO	900 max.	1 3/16"	1
FORAGRES DRILL BIT 3" (75 MM.)	04975	SUPERPRO	900 max.	1 5/16"	1
FORAGRES DRILL BIT 4" (100 MM.)	04976	SUPERPRO	450 max.	1 3/16"	1
FORAGRES DRILL BIT 4 3/4" (120 MM.)	04977	SUPERPRO	450 max.	1 3/16"	1



- · Specially designed for dry drilling in porcelain tile. Suitable for other ceramic materials, natural stone and artificial stone.
- · With high resistant welding of the diamond grains for a longer duration.
- · "Easy-Start" Without slipping. Suitable for work without a centering guide.
- · Perfect for cordless drills (1000 2500 rpm)
- · Reinforced body with grub screw for better performance and rigidity, thus maintaining the wax on the tip of the drill.
- · High quality finish.
- · Certified for Dekton.

	REF	$\triangle$	RPM		
DRYGRES DRILL BITS 4DRILL Ø 1/4" (6 MM.)	05951	SUPERPRO	1000 min.	1 7/16"	1
DRYGRES DRILL BITS 4DRILL 0 5/16" (8 MM.)	05952	SUPERPRO	1000 min.	1 7/16"	1
DRYGRES DRILL BITS 4DRILL Ø 3/8" (10 MM.)	05953	SUPERPRO	1000 min.	1 7/16"	1
DRYGRES DRILL BITS 4DRILL Ø 1/2" (12 MM.)	05954	SUPERPRO	1000 min.	1 9/16"	1
DRYGRES DRILL BITS 4DRILL Ø 9/16" (14 MM.)	05956	SUPERPRO	1000 min.	1 9/16"	1
DRYGRES DRILL BITS 4DRILL Ø 3/4" (20 MM.)	05957	SUPERPRO	1000 min.	1 9/16"	1
DRYGRES DRILL BITS 4DRILL Ø 1 1/8" (28 MM.)	05970	SUPERPRO	2000 min.	1 9/16" 40 mm	1
DRYGRES DRILL BITS 4DRILL Ø 1 3/8" (35 MM.)	05971	SUPERPRO	2000 min.	1 9/16" 40 mm	1



REF




· Diamond drill bits 0 3/4", 1 1/8", 1 3/8", 1 3/4", 2" and 2 11/16"

RPM

50903 SUPERPRO 900 max. 13/16"



XX



- · DRYGRES 4DRILL diamond drills dry cut 01/4", 5/16", 3/8" and 1/2" (06,8,10 and 12 mm).
- · With case.

	REF	$\triangle$	RPM	
KIT DRYGRES 4DRILL	05968	SUPERPRO	1000 min.	1



### **MULTIDRILL** guide

2 Cut & Drill



• By fixing with suction cup, allows horizontal and vertical holes in the right place, preventing the drill bit from slipping.

 $\cdot$  Compatible with dry cutting diamond drill bits, removable diamond drill bits 0 1/4" to 9/16" [6–14 mm.] and wet cutting diamond drill bits 0 13/16" to 3" [20–75 mm.].

	REF	$\triangle$	
MULTIDRILL GUIDE	51921	PRO	1

### Tank for MULTIDRILL guide





- · Bottle of 1200 ml. volume, with manual pressure pump.
- · Includes 3/32" (2 m). hose.

	REF	$\triangle$	
TANK AND HOSE FOR MULTIDRILL GUIDE	50947	PRO	1

### Electric drill adapter













- $\cdot$  Chuck attachable to RUBIMIX–9 and 9 PLUS to work with hexagonal and round finishing rods below 12mm. [%"]
- · Includes chuck key S2 Ref. 71969.


	REF	$\triangle$	
СНИСК	71967	SUPERPRO	1

- · For the use of dry cutting diamond drill bit with electric drill. [M14]
- · Use without hammer.

	REF	$\triangle$	
M14 ADAPTER FOR ELECTRIC DRILL	05976	SUPERPRO	1






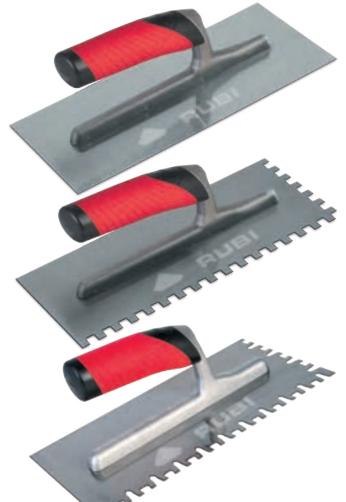

- $\cdot$  Steel plate special high wear resistance with corrosion protection by clear
- · Ergonomic RUBIFLEX handle with two textures.
- · Perfect flatness of the plate.

	REF	$\triangle$	H	П	HE		
STEEL NOTCHED TROWEL /8"X1/8" (3X3 MM.)	76961	SUPERPRO	1/8"	1/8"	0"	6	270
TEEL NOTCHED TROWEL 11" (28 CM.) 3/16"X3/16" (4.5X4.5 MM.)	76965	SUPERPRO	3/16"	3/16"	0"	6	270
TEEL NOTCHED TROWEL 11" 28 CM.) 1/4"X1/4" (6X6 MM.)	76962	SUPERPRO	1/4"	1/4"	0"	6	270
TEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X13/32" (6X10 MM.)	76966	SUPERPRO	1/4"	3/8"	0"	6	270
TEEL NOTCHED TROWEL 11" (28 M.) 1/2"X1/2" (12X12 MM.)	76967	SUPERPRO	1/2"	1/2"	0"	6	270
TEEL NOTCHED TROWEL 11" 28 CM.) R-13/32" (10 MM.)	76964	SUPERPRO	0"	0"	3/8"	6	270
TEEL NOTCHED TROWEL 28 CM. YW	72949	SUPERPRO	1/4 / 1/2"	5/16 / 1/4"	0"	6	270



- · Tile adhesive (thin-set) application.
- · Aluminum structure. Light and resistant. Bi-material handle RUBIFLEX. Improves ergonomics. Stainless steel plate.
- $\cdot$  Plate's fixation by 6 electro welded points. Irremovable and maximum mechanical resistance.

	REF	$\triangle$	
PRO STAINLESS STEEL 1/8" X 1/8" TROWEL	76951	PRO	6
PRO STAINLESS STEEL 1/4" X 1/4" TROWEL	76952	PRO	6
PRO STAINLESS STEEL 5/16"X 5/16" TROWEL	76953	PRO	6
PRO STAINLESS STEEL 3/8" X 3/8" TROWEL	76954	PRO	6
PRO STAINLESS STEEL 1/2" X 1/2" TROWEL	76955	PRO	6



























# RUBI



























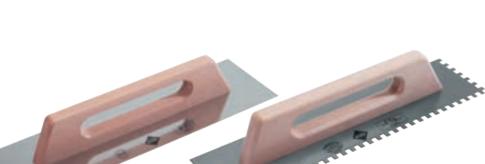

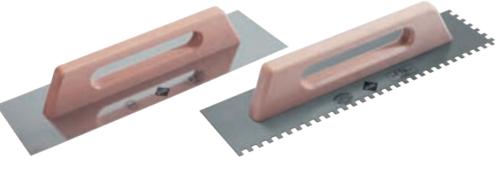

- · Steel plate special high wear resistance, corrosion-protected by clear coat (STEEL).
- · Stainless steel plate special high wear resistance (INOX)
- · Perfect flatness of the plate.
- $\cdot$  The notches 13/16" x 13/16" (20 x 20 mm.) developed for dosing of glue mortar on uneven floors. Allows more material thickness.

	REF	$\triangle$		П	J-JH		
STEEL TROWEL 19" (48 CM.)	65988	SUPERPRO	0"	0"	0"	6	312
STEEL NOTCHED TROWEL 19" [48 CM.] 1/4" X 1/4" [6 X 6 MM.]	65958	SUPERPRO	1/4"	1/4"	0"	6	312
STEEL NOTCHED TROWEL 19" (48 CM.) 3/8" X 3/8" (8 X 8 MM.)	65959	SUPERPRO	5/16"	5/16"	0"	6	312
STEEL NOTCHED TROWEL 19" (48 CM.) 13/32" X 13/32" (10 X 10 MM.)	65983	SUPERPRO	3/8"	3/8"	0"	6	312
STEEL NOTCHED TROWEL 19" (48 CM.) 1/2" X 1/2" (12 X 12 MM.)	73973	SUPERPRO	1/2"	1/2"	0"	6	312
STEEL NOTCHED TROWEL 19" (48 CM.) 13/16" X 13/16" (20 X 20 MM.)	75962	SUPERPRO	13/16"	13/16"	0"	6	312



- · Double stainless steel for corrosion resistance.
- · Spread more adhesive with each pass.
- · Ideal for tile with an edge 15" and large.

	REF	$\triangle$		J-J-E		TI	
16" NOTCHED TROWEL 16" 1/2"X1/2"X1/2"	26976	SUPERPRO	1/2"		1/2"	1/2"	6
16" NOTCHED TROWEL 16" 1/4"X1/2"X1/4"	26977	SUPERPRO	-	1/4"	1/2"	1/4"	6
16" NOTCHED TROWEL 16" 1/4"X3/8"X1/4"	26978	SUPERPRO	1/4"	-	3/8"	1/4"	6
16" NOTCHED TROWEL 16" 1/4"X1/4"X1/4"	26979	SUPERPRO	1/4"	-	1/4"	1/4"	6
-							

#### **PRO HEAVY DUTY SCRAPER 5"**





(o)

##

××





· Ergonomic RUBIFLEX.

	REF	$\triangle$	B	L	Å	
PFP05-180 MM. (7 1/16")	75418	SUPERPRO	7"	4 1/8"	0.628 Lb	6
PFP05-200 MM. (7 7/8")	75420	SUPERPRO	8"	4 5/16"	0.703 Lb	6



- · To remove old coverings (ceramic tiles, wallpaper, vinyl tiles, carpets, paint, etc..)
- · Ideal for repair jobs (substitution of broken tiles) and renovations.

	REF	$\triangle$	
PRO HEAVY DUTY SCRAPER 5"	66953	SUPERPRO	1
5 BLADES FOR PRO HEAVY DUTY SCRAPER 5"	66954	SUPERPRO	1

### **Bucket Trowel** PFP19



**Margin Trowel** PFP33





### Joint scraper




### White rubber mallet









· Ergonomic RUBIFLEX handle



- · Ergonomic handle with two electroplated tungsten carbide plates with high resistance
- · Useable with 1, 2 or 3 plates depending on width of the joint.
- · Supplied in blister.

to abrasion.

	REF	$\triangle$		
JOINT SCRAPER	65907	PRO	5	600
SPARE JOINT SCRAPER	71974	PRO	10	4600

- · WHITE RUBBER MALLET flat/rounded 18oz
- · Non-marring head makes this tool ideal for working with finished surfaces.

	REF	$\triangle$	
WHITE RUBBER MALLET 18 OZ	66906	SUPERPRO	6



##



### **RUBISCRAPER-250**

Electric grout scraper For grout removal without damaging the tile.





- Ergonomic design and bi-material finishing, for greater comfort and better stability.
- 2 Light and resistant. Maximum reliability.
- Blades made in tungsten carbide. Resharpenable for a greater performance. Patented model.
- Fast locking / unlocking system for easy assembly of blade.
- · Ideal for repair work (replacement of broken tiles).
- Equipped with 3 speeds. V1: 6500 i.p. / V2: 8000 i.p. / V3: 9500 i.p.
- · Power: 250 W.
- · Stroke length: 3/32" (2 mm).
- · Double insulation.
- $\cdot$  Blades for joints of 1/16" (1.5 mm) (ref. 66810, use only with speed 1) and 1/8" (3 mm) (ref. 66812) included.
- · Includes 2 special blades (steel made) Ref. 66243 & 66244 to remove rests of thin-set from the back of the tiles or on the substrate.
- · Transpot Case Included
- · Interchangeable blades for 1/16"(1.5mm), 3/32" (2mm), 1/8" (3mm) and 3/16" (4 mm) joints.











	REF	$\triangle$ $\neq$	W	
RUBISCRAPER-250 USA	66942	SUPERPRO 120V-60Hz	250	1
1.5 MM (1/16") BLADE	66810	SUPERPRO		1
3 MM (1/8") BLADE	66812	SUPERPRO		1





XX

### **Nippers for Porcelain Tiles**





- · Specially for cutting narrow strips of a maximum of 7/16"
- · [1cm.].
- · Replaceable scoring wheels (Ref:01953).
- · Equipped with tungsten carbide scoring wheels with titanium surface treatment to last longer. With a gentle turn, the scoring wheels can be repositioned when they start getting worn.

	REF	$\triangle$		
NIPPERS FOR PORCELAIN TILES	83942	SUPERPRO	5	765

### Nippers for ceramic tiles

· Tungsten carbide edge of great hardness.

REF

65926 SUPERPRO

· To rectify cuts of ceramics.

NIPPERS FOR CERAMIC TILES





## Latex gloves



















XX

















· Made of 100% latex.

· Ideal for wet or abrasives tasks.

- · Conforms to EN420.

	REF	$\triangle$	
LATEX GLOVES	20907	SUPERPRO	12

### **Shape Template**





· Copies the shape of the areas which are awkward to mark onto tiles, for subsequent cutting. Maximum depth 1 3/4" (4.5cm)

	REF	$\triangle$	
SHAPE TEMPLATE	70925	SUPERPRO	10

#### **RubiLevel Antishock**





- Three bubbles for checking horizontal, vertical and and 45° levels.
- · Double and ergonomic bi-material handle.
- · Rubber protector at the ends.
- DUAL view vertical vial for front measurements. Eliminates parallax error.
- · MAGNIFIED horizontal vial for the CLEAREST view of the bubble.

	REF	$\triangle$		
RUBILEVEL ANTISHOCK 24" (60 CM.)	76932	SUPERPRO	8	672
RUBILEVEL ANTISHOCK 32" (80 CM.)	76933	SUPERPRO	8	504
RUBILEVEL ANTISHOCK 40" (100 CM.)	76934	SUPERPRO	8	392
RUBILEVEL ANTISHOCK 48" (120 CM.)	76935	SUPERPRO	8	392



## Folding 4-in-1 working table

















- · Great capacity (650 cc) grout mortat applicator.
- · Very light structure made of aluminum.
- $\cdot$  Replaceable and adjustable nozzles to the joint width.
- $\cdot$  Also usable for the application of silicone and PU rigid and flexible cartridges. Quick and clean application.

	REF	$\triangle$	
MANUAL GROUT MORTAR APPLICATOR 650 CC.	65990	SUPERPRO	1
SET OF SPARE PADS FOR GROUT MORTAR APPLICATOR(INCLUDES SCREW, PISTON AND 3 NOZZLES)	65981	SUPERPRO	1
SPARE NOZZLES FOR GROUT MORTAR APPLICATOR (INCLUDES 6 NOZZLES)	65980	SUPERPRO	1





· Thrust Ratio (12:1)

RUBI

 $\odot$ 

##

XX

	REF	$\triangle$	
CAULK GUN 9 INCH	66992	SUPERPRO	6

Caulk gun 9 inch











- · For easy adjustment and levelling of the rule for wall tiling.
- · In box of 2 units.



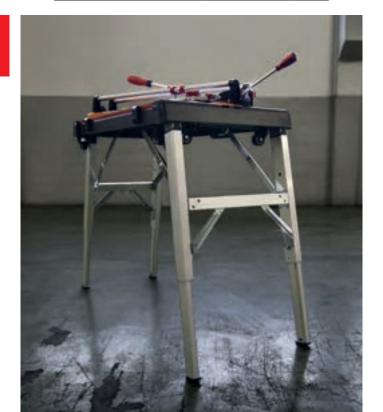



- · 4 uses in 1: Work bench, scaffold, dolly and creeper.
- · Foldable, easy to transport and storage.
- · Double sided board: MDF wood side (work bench function) and non-slippery PP plastic side (rest of functions). EASY interchangeable.
- · Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- · Angle conveyor and rule printed on the wooden side. also includes a hole for small drillings (max. 1", 25 mm) and hand tools insterts on metal frame.
- Folded table: 31 1/2"x20 1/2"x5" (80x52x12,5cm).
- · Unfolded table: 45 1/4"x20 1/2"x31 1/2" (115x52x80cm).

	REF	$\triangle$		
FOLDING 4-IN-1 WORKING TABLE	66924	SUPERPRO	1	16



### **Grout Floats PRO**





- · Grout Float (Ref.26906) with sheet resistant to abrasion.
- · Replaceable with spare (ref. 84925).

	REF	$\triangle$	
SPARE GROUT FLOAT PRO	84925	PRO	15
REPLACEABLE GROUT FLOAT PRO	26906	PRO	6



- · Black foam rubber.
- · Grout Float PRO 9"x4" 22.5x10cm.(Ref.84926), with white rubber sheet wear resistant.

	REF	$\triangle$		
RUBBER GROUT FLOAT 9"X4"X19/32" (22,5X10X1,5CM)	84926	PRO	6	384



### Flexible plaster floats







- · Plastic ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- · Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF	$\triangle$		
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65973	SUPERPRO	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65972	SUPERPRO	6	540





- · Plastic ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- · Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF	$\triangle$		
RUBBER GROUT FLOAT SUPERPRO	65971	SUPERPRO	6	540



- · For multi finish and skimming plaster jobs (also compatible with microcement).
- · Ideal for vertical jobs in heights.
- · 3/64" (1,2 mm) thick polypropylene (PP) plate.

	REF	$\triangle$	
FLEXIBLE FINE PLASTIC HANDLE FLOAT	71904	SUPERPRO	6































# Tile Spacer 1/16" (1.5mm)















- · For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF	$\triangle$		
TILE SPACERS 1/32" (1 MM.) - (B-300 U.)	26998	SUPERPRO	10	1200

· Quality base material, without impurities or imperfections.

REF

26990 SUPERPRO

02281 SUPERPRO

- · For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF	$\wedge$		角
		$\longrightarrow$		<del></del>
TILE SPACERS 1/16" (1.5 MM.) -	26991	SIIPERPRO	10	960
(B-300 U.)	20771	JUPERPRU	10	700
TILE SPACERS	02200	CUREBBB		
1/16" - (1000 PC.) JAR	02280	SUPERPRO	1	

- · For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF	$\triangle$		
TILE SPACERS 3/32" (2 MM.) - (B-300 U.)	26997	SUPERPRO	10	1680

### Tile Spacers 1/8" (3mm)





· For floor tiles with thin joint.

TILE SPACERS 1/8" (3 MM.)

1/8" - (1000 PC. JAR)

-(B-200 U.) TILE SPACERS



1

### Tile Spacers 3/16" (5mm)









- · For floor tiles.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

		-	_	
	REF	$\triangle$		
TILE SPACERS 3/16" (5 MM.) -(B-100 U.)	26989	SUPERPRO	10	960
TILE SPACERS 3/16" - (400 PC. JAR)	02282	SUPERPRO	1	

### Tile Spacers 1/4" (6mm)







- · For floor tiles.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	$\triangle$		
TILE SPACERS 1/4" (6 MM.) - [B-100 U.)	26996	SUPERPRO	10	540



 $\odot$ 

##





### T-spacers 1/32" (1mm)



### T-spacers 1/16" [1.5mm]

· Ideal for "Brick Bond" and perimeter joints.



### T-spacers 1/8" (3mm)













T-SPACERS 1/16" (1.5MM) (B-300 UN.)

T FOR GROUTS 1/16" (1.5MM) (JAR-1000



· Quality base material without impurities or imperfections.

REF

26988 SUPERPRO

02715 SUPERPRO







,		'		
	REF	$\triangle$		
T-SPACERS 1/8" (3 MM.) -(B-200 U.)	26986	SUPERPRO	10	1680
"T" SPACERS 1/8" -(JAR-1000 U.)	02399	SUPERPRO	1	

· Ideal for "Brick Bond" and perimeter joints.

T-spacers 3/16" (5mm)

· Quality base material without impurities or imperfections.

	REF	$\triangle$		
T-SPACERS 1/32" (1MM) (B-300 UN.)	02859	SUPERPRO	10	

UN.) USA


















- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF	$\triangle$		
T-SPACERS 3/16" (5 MM.) -(B- 100 U.)	26987	SUPERPRO	10	2040
"T" SPACERS 3/16" -(JAR-400 U.)	02398	SUPERPRO	1	

## Wedges





- · Wedges for tiling.
- · Quality base material, without impurities or imperfections.

	REF	$\triangle$		
WEDGES 3/16" (5 MM.)-(B-500 U.)	02950	SUPERPRO	10	1500
WEDGES 3/16" (5MM.)-(JAR-500 PCS.)	02283	SUPERPRO	1	





- · For Rectify the position of the pieces during installation.
- · Thanks to their geometry, horseshoe shaped, these spacers can be combined together to give the same function as a traditional crosshead or "T".

	REF		
SPACER HORSESHOE 1/16" (300 UN) JAR	13841	SUPERPRO	10
SPACER HORSESHOE 1/8" (250 UN) JAR	13840	SUPERPRO	10





























### Kit Delta Level System

RUBI

 $\odot$ 

##



### $\cdot$ The kit consists of 1 pliers, 100 Clips and 100 reusable wedges.

· Packaged in a handy bucket.

REF	$\triangle$		
03913	SUPERPRO	1	80
03914	SUPERPRO	1	80
	03913	03913 SUPERPRO	03913 SUPERPRO 1

### CONSUMPTION SQUARE FORMATS EXTRA-LARGE FORMATS inch 12"x12" 16"x16" 18"x18" 20"x20" 24"x24" 30"x30" 32"x32" 36"x36" 40"x40" 48"x48" 40"x60" 40"x120" 48"x48" 48"x142" 60"x60" 60"x120" RECTANGULAR FORMATS 6"x24" 6"x35" 6"x48" 9"x16" 9"x24" 9"x30" 9"x40" 12"x40" 12"x24" 12"x36" 12"x48" 16"x32" 16"x48" 18"x36"


### **Delta Level System Pliers** Fast-Fix











- · Made of steel with bi-material Soft-grip handles for greater
- · Protective cover on the pressure cam to avoid damaging the tile.

	REF	$\triangle$		
DELTA LEVEL SYSTEM PLIERS FAST-FIX	03901	SUPERPRO	6	



· Reusable.

	REF	$\triangle$		
DELTA LEVEL SYSTEM WEDGE (B-200 UN)	02844	SUPERPRO	13	104
DELTA LEVEL SYSTEM WEDGE (B-400 UN)	02845	SUPERPRO	6	48
DELTA LEVEL SYSTEM WEDGE (B-1200 UN)	02857	SUPERPRO	1	16

### **Delta Level System Clip**









**NEW** 

- · Made in Polypropylene. Different clip sizes available:
- · Clip 1/32" (1 mm) 1/16" (1.5 mm) and 3/32" (2 mm). for tiles from 1/8" (3mm) to 1/2" (12 mm) thick.
- $\cdot$  1/8" [3 mm] and 3/16" [5 mm] clip for tiles from 1/4" [6 mm] to 9/16"(15 mm) thick.

נט ייזוט (נווווון נווונא.				
	REF	$\triangle$		
200 clips 1/32" delta lev. sys [1/8"–1/2"]	02851	SUPERPRO	21	168
400 clips 1/32" delta lev. sys [1/8"–1/2"]	02839	SUPERPRO	13	96
2400 clips 1/32" delta lev. sys [1/8"-1/2"]	02870	SUPERPRO	1	16
200 clips 1/16" delta lev. sys [1/8"-1/2"]	02841	SUPERPRO	21	168
400 clips 1/16" delta lev. sys [1/8"-1/2"]	02842	SUPERPRO	13	96
2400 clips 1/16" delta lev. sys [1/8"–1/2"]	02855	SUPERPRO	1	16
200 clips 3/32" delta lev. sys [1/8"–1/2"]	02853	SUPERPRO	24	192
400 clips 3/32" delta lev. sys [1/8"–1/2"]	02854	SUPERPRO	13	96
2400 clips 3/32" delta lev. sys [1/8"–1/2"]	02856	SUPERPRO	1	16
200 clips 1/8" delta lev. sys [1/4"-9/16"]	02867	SUPERPRO	21	168
400 clips 1/8" delta lev. sys [1/4"-9/16"]	02868	SUPERPRO	11	96
2400 clips 1/8" delta lev. sys [1/4"–9/16"]	02869	SUPERPRO	1	16
200 clips 3/16" delta lev. sys [1/4"–9/16"]	06827	SUPERPRO	21	168
400 clips 3/16" delta lev. sys [1/4"-9/16"]	06828	SUPERPRO	11	88
2400 clips 3/16" delta lev. sys [1/4"-9/16"]	06829	SUPERPRO	1	16
.00 clips 1/16" delta lev. sys [7/16"–7/8"]	02846	SUPERPRO	20	320
100 CLIPS 3/16" DELTA LEV. SYS [1/2"-7/8"] <b>NEW</b>	06981	SUPERPRO	20	240





































- $\cdot$  Cross base clips of 1.5 mm (1/16") and 3 mm (1/8") .
- · Visual thickness identification by colour.

	REF	$\triangle$		
CYCLONE L.S. 1,5 MM CROSS BASE (B-100)	35952	SUPERPRO	36	432
CYCLONE L.S. 1,5 MM CROSS BASE (B-300)	35953	SUPERPRO	12	144
CYCLONE L.S. 1,5 MM CROSS BASE (B-2400)	35954	SUPERPRO	1	20
CYCLONE L.S. 3 MM CROSS BASE (B-100)	35955	SUPERPRO	36	432
CYCLONE L.S. 3 MM CROSS BASE (B-300)	35956	SUPERPRO	12	144
CYCLONE L.S. 3 MM CROSS BASE (B-2400)	35957	SUPERPRO	1	20

- The kit consists of 300 clips and 100 reusable caps.
- · Packaged in a practical bucket.

	REF	$\triangle$		
KIT CYCLONE 1,5 MM	35964	SUPERPRO	1	40
KIT CYCLONE 3 MM	35965	SUPERPRO	1	40
KIT CYCLONE 5 MM	35903	SUPERPRO	1	40

- $\cdot$  Flat base clips of 1mm (1/32"), 1.5mm (1/16"), 2mm (3/32") and 3mm (1/8"), 5mm (3/16").
- · Visual thickness identification by colour.

· Available in various models:

	REF	$\triangle$		
CYCLONE L.S. 1 MM FLAT BASE (B-100)	35937	SUPERPRO	36	432
CYCLONE L.S. 1 MM FLAT BASE (B-300)	35938	SUPERPRO	12	144
CYCLONE L.S. 1 MM FLAT BASE (B-2400)	35939	SUPERPRO	1	20
CYCLONE L.S. 1,5 MM FLAT BASE (B-100)	35940	SUPERPRO	36	432
CYCLONE L.S. 1,5 MM FLAT BASE (B-300)	35941	SUPERPRO	12	144
CYCLONE L.S. 1,5 MM FLAT BASE (B-2400)	35942	SUPERPRO	1	20
CYCLONE L.S. 2 MM FLAT BASE (B-100)	35943	SUPERPRO	36	432
CYCLONE L.S. 2 MM FLAT BASE (B-300)	35944	SUPERPRO	12	144
CYCLONE L.S. 2 MM FLAT BASE (C-2400)	35945	SUPERPRO	1	20
CYCLONE L.S. 3 MM FLAT BASE (B-100)	35946	SUPERPRO	36	432
CYCLONE L.S. 3 MM FLAT BASE (B-300)	35947	SUPERPRO	12	144
CYCLONE L.S. 3 MM FLAT BASE (C-2400)	35948	SUPERPRO	1	20
CYCLONE L.S. 5 MM FLAT BASE (B-100) <b>NEW</b>	35900	SUPERPRO	36	12
CYCLONE L.S. 5 MM FLAT BASE (B-300) <b>NEW</b>	35901	SUPERPRO	12	12
CYCLONE L.S. 5 MM FLAT BASE (C-2400) <b>NEW</b>	35902	SUPERPRO	1	20

### **CYCLONE CROSS T BASE**



- · Available in various models:
- $\cdot$  1.5 mm (1/16") and 3 mm (1/8") T-base flanges.
- · Visual identification of thickness by colors.

	REF	$\triangle$		
CYCLONE L.S. 1,5 MM CROSS T BASE (B-100)	35958	SUPERPRO	36	432
CYCLONE L.S. 1,5 MM CROSS T BASE (B-300)	35959	SUPERPRO	12	144
CYCLONE L.S. 1,5 MM CROSS T BASE (C-2400)	35960	SUPERPRO	1	20
CYCLONE L.S. 3 MM CROSS T BASE (B-100)	35961	SUPERPRO	36	432
CYCLONE L.S. 3 MM CROSS T BASE (B-300)	35962	SUPERPRO	12	144
CYCLONE L.S. 3 MM CROSS T BASE (C-2400)	35963	SUPERPRO	1	20

### **CYCLONE CAPS**







- · Special 1/4" (6 mm) external thread.
- Eccentric detail for better force concentration.
- · Crowned area for better grip.
- · Dimensions: 2 " 5/16 x 2 " 5/16 x 1 " 1/2 (59x59x38 mm).
- · Supplied in reusable container.

	REF	$\triangle$		
CYCLONE CAPS (B-100)	35949	SUPERPRO	5	50
CYCLONE CAPS (B-300)	35950	SUPERPRO	4	24
CYCLONE CAPS (B-1200)	35951	SUPERPRO	1	12






##



· The set consists of pliers, 100 Straps and 100 reusable caps. Packaged in a handy bucket.

	REF	$\triangle$		
KIT TILE LEVEL QUICK	02941	PREMIUM	1	80





- · Metal version of the plastic TLQ pliers, fully compatible.
- · Made of zinc-plated carbon steel.
- · Ergonomic bi-material handle (plastic and rubber).
- · Height adjustment with regulation screw (no tools required).

	REF	$\triangle$	
TILE LEVEL QUICK HEAVY DUTY NIPPER	03900	PREMIUM	1

### TILE LEVEL QUICK Straps









 $\cdot$  Reusable caps. Made of POM. Its design ensures even

distribution of the contact pressure.

	REF	$\triangle$		
TILE LEVEL CAPS (B-100 U.)	02890	PREMIUM	10	300
TILE LEVEL CAPS (B-400 U.)	02892	PREMIUM	8	64



- · Made of technical polymer non-hygroscopic.
- · Doesn't need soaking before use.
- The Strap thickness guarantees minimum grout of 1/16" (1.5 mm).
- · Ensures continuous tension between straps and caps.
- · Grooved bases to improve the wetting of ceramic tile.

	REF	$\triangle$		
TILE LEVEL (B-100 U.) STRAP	02893	PREMIUM	6	180
TILE LEVEL (B-400 U.) STRAP	02895	PREMIUM	6	48







· Ergonomic design with bimaterial handle. Made of very light and resistant materials. Tighten regulation system depending on the thickness of the ceramic tile.

	REF	$\triangle$		
TILE LEVEL QUICK PLIERS	02989	PREMIUM	1	756

Plastic bucket model 2 "Lightbuck" (5.8 gal.)



### Plastic tub №. 3 "Flextub" (10.5 gal.)











- Greater comfort during transport. Easy waste collection.
- · Heavy duty metal handle
- · Plastic handle. Comfort.





- · Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.

REF	$\triangle$	<b>□</b> ;					
88773	PRO	13"	17 5/16"	10.5 gal.	2.9 Lb	10	300



- · Greater comfort during transport. For easy waste collection.
- · Lightweight.

REF	$\triangle$	<b>□</b> ;	$\dot{\Box}$				
88774	PRO	13"	20 7/8"	55 I.	3.5 Lb	10	200





























(<u>o</u>





- · Aluminum chassis high strength and stability.
- · Allows an ergonomic position of comfort.
- · Prevents injuries in knees and back.
- · Adjustable seat height and angle for optimum adaptation to each use. Robust construction with 7 heavy duty wheels.
- · Includes tray for tools and accessories.
- · Ideal for flooring, parquet installation, cleaning and other operations on pavements tasks. Replaceable ergonomic kneepads. Maximum weight: 286 lb. [130 kg.]

	REF	$\triangle$		
SR-1 ERGONOMIC SEAT	81999	SUPERPRO	1	18

### Gel Duplex knee pads



- Their design combines the use of hard materials to protect against impacts and uneven floors and soft materials adaptable to the user's anatomy on the inside.
- · Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- · Wide range of uses thanks to their design " two in one ":
- · Can be used together with the external rubber protection of great stability and resistance.
- · With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- · They incorporate a double fastener, inferior and superior, easy adjustable.
- · Conforms to EN14404.
- · Protection level: 1

	REF	$\triangle$		
GEL DUPLEX KNEE PADS	81989	PREMIUM	6	96

### **Professional Knee Pads N**





- · Professional knee pads of great comfort.
- · Made of absorbent material to protect against knocks and bumps of the ground.
- · Its internal design is perfectly adaptable to the user's
- · Big leaning surface for optimum stability.
- · Adjustable superior fastener

,					
	REF	$\triangle$			
PROFESSIONAL KNEE PADS	65915	SUPERPRO	6	192	

### Gel Comfort knee pads





- · Ergonomic design professional and high comfort knee pads.
- · Its design combines the use of hard materials against impacts and uneven floors and soft materials therein, adapted to the user's anatomy.
- · In addition to protecting the user's knees through the use of silicone gel inside, its studied ergonomics provide them with great stability, preventing ligaments and tendons fatigue.
- · They incorporate two bands Neoprene closure.
- · Conforms to EN14404.
- · Protection level: 1

	REF	$\triangle$		
GEL COMFORT KNEE PADS	81998	SUPERPRO	6	96



### **RUBICLEAN TRIPLE SUPERPRO**





### **RUBICLEAN ECO KIT**































· PLUS model has cuts for increased performance in wiping away

	REF	$\triangle$		<b></b>	6		
SPONGE FLOAT SUPERPRO PLUS	20908	SUPERPRO	11 1/16x7 11/16x1"	1	2	10	180



- · Plastic washboy, lightweight and high resistance.
- · Equipped with 3 spiral rollers for further draining.
- · Includes wheels and carrying handle.
- · Capacity: 5.3 gl. (24 l.)
- Useful capacity: 2.2 gl. (10 l.)
- · Dimensions: 20 7/8" x 11 1/32" x 14 9/16" [53 x 28 x 37 cm.]

	REF	$\triangle$		
RUBICLEAN TRIPLE SUPERPRO WASHBOY	21995	SUPERPRO	1	18



- · Composed by:
- · Rubiclean Eco (Ref. 24948), Sponge standard (Ref. 24966), Rubber Trowel for Joints (Ref. 24969) and High absorption sponge plus with handle (Ref. 84927).
- · Capacity: 5.2 gl. (20 l.)

	REF	$\triangle$	
RUBICLEAN ECO KIT	68910	PRO	1





**Sponge Float SUPERPRO** 

• The PLUS model has slits for increased performance drag dirt.

	REF	$\triangle$		6	$\bigoplus$		
SPONGE FLOAT	84927	PRO	11 1/16x5	7	7	10	740
PRO PLUS	04727	PKU	1/2x1 3/16"	2	3	10	240

### Replaceable Superpro Sponges 12" x 5 11/32" (30x13,5cm)





· PLUS models have cuts for increased drag on the dirt.



22900 SUPERPRO 12x5 5/16x1 FLOAT WITH REPLACEABLE SUPERPRO SPONGE 10 FLOAT WITH
REPLACEABLE SWEEPEX 22916 SUPERPRO 9/16"

12x5 5/16x1
SUPERPRO SPONGE 9/16" 10 180 22910 SUPERPRO 12x5 5/16x1 REPLACEABLE SUPERPRO SPONGE 10 320 9/16" 22918 SUPERPRO 12x5 5/16x1 REPLACEABLE SUPERPRO SPONGE 10 320 9/16" 22932 SUPERPRO 12x5 5/16x1 10 22922 SUPERPRO 12x5 5/16x1 10 320 3/16" 22914 SUPERPRO 12x5 5/16x1 10 320


































- · To clean ceramic surfaces and other materials.
- · Float with three different roughness replaceable pads; soft (red), medium (blue) and hard (brown).
- · Float with three very stuff pads (white).
- · 3 sets of pads: very soft (white), soft (red), medium (blue) and hard
- · Available set of 3 pads of different roughness: soft (red), medium (blue) and hard (brown).

	REF	$\triangle$		
FLOAT + 3 MIXED PADS	20900	SUPERPRO	10x4x1"	1
3 PADS REPLACEMENT SET - MEDIUM	20973	SUPERPRO	10x4x1"	1
3 PADS REPLACEMENT SET - HARD	20974	SUPERPRO	10x4x1"	1
3 PADS REPLACEMENT SET - SOFT/MEDIUM/HARD	20902	SUPERPRO	10x4x1"	1

### **SUPERPRO sponges**





- · PLUS models have cuts for increased drag on the dirt.
- · Ref. 20905 available in Palbox.

	REF	$\triangle$		$\bigoplus$			
SUPERPRO SPONGE	20905	SUPERPRO	8x5 1/8x2 3/4"	1	2	24	384
MIXED SUPERPRO SPONGE	20906	SUPERPRO	8x5 1/8x2 3/4"	4	2	24	288
EPOXY CELLULOSE SUPERPRO SPONGE	22928	SUPERPRO	6 11/16x4x1 9/16"	4	4	12	792
STANDARD PRO SPONGE	24966	SUPERPRO	6 11/16x4x2 3/4"	2	1	24	720

### **Hidro Rounded Sponges**





- · Convenient box with 2 bags x 30 Hidro Rounded Sponge vacuum packaged. Not individually packed.
- · Polyurethane sponges.
- · HIDRO models are highly absorbent.
- · Extra large all purpose sponge.

	REF	$\triangle$	
HIDRO ROUNDED SPONGE VACUUM PACKAGED (60UN)	68999	PRO	60

### **Hidro Rounded Sponges**





- · Mixed Rounded Sponge vacuum packaged 30 units, not individually packed.
- · Polyurethane sponges.
- · Mixed models : heavy duty grouting and haze buffer sponges.

	REF	$\triangle$	
MIXED ROUNDED SPONGE VACUUM PACKAGED (30UN)	68997	PRO	60







- $\cdot$  Ready to use by just removing the cover.
- · It contains:
- $\cdot$  20 DELTA Leveling System kits.
- Measurements: 23 5/8 x 15 3/4 x 41 5/16 (60 x 40 x 105 cm).

	REF	
DELTA LEVELING SYSTEM 1/32" (1MM) PAL BOX (20 UN.)	03917	1
DELTA LEVELING SYSTEM 1/6" (1,5MM) PAL BOX (20 UN.)	03916	1





- · HIDRO models are highly absorbent.
- · Extra large all purpose sponge.

	REF	
XL HIDRO ROUND SPONGE-DISPLAY (22 1/2"X 20 3/16"X 23 5/8")	68995	120

· Display will be sent unassembled.



- ·Sponges provides individually packed and with cardboard display. Polyurethane sponges.
- · Mixed models : heavy duty grouting and haze buffer sponges.

	REF	
MIXED ROUND SPONGE-DISPLAY (22 1/2"X 20 3/16"X 23 5/8")	68996	120

· Display will be sent unassembled.




















































· Contains x135 units of ref. 20905.

BUILDING THE FUTURE TOGETHER





- · Cardboard general display.
- · Dimensions: 55 1/8 (1.40 m) high, 16 1/8 (41 cm) wide, 12 5/8 (32 cm) deep.

	REF	
CARDBOARD GENERAL DISPLAY	91905	1



· Trays and shelves are optional.

	REF	
GENERAL DISPLAY 40" X 89" [100CM X 225CM]	90811	1
GENERAL DISPLAY 25" X 89" (65CM X 225CM)	90812	1
GENERAL DISPLAY 40" X 89" (100CM X 40CM) SHELF	90570	1
GENERAL DISPLAY 25" X 89" (65CM X 40CM) SHELF	90571	1
SHORT HOOK FOR GENERAL DISPLAY	90681	1
SET 2 DISPLAY BARS	90810	1
PRICE HOLDER HOOK	90656	1
PRICE HOLDER HOOK LABEL	90709	1











- $\cdot$  Metal display stand with the capacity to display a manual cutter.
- · It incorporates an anti-theft system. · Dimensions: 84" x 14" x 23" (2130x350x582 mm).

	REF	
MANUAL CUTTERS RACK (1 FACE)	93138	1

- Capacity to display 3 manual tile cutters. Dimensions: 46" x 22" x 10" (1170x560x260 mm).

	REF		
DISPLAY FOR MANUAL CUTTERS.	90305	1	6

- · Display stand to hold two mixers and various mixing paddles.
- · Dimensions: 79" x 48" x 29 1/2" (2000x1211x750 mm).

	REF	
DISPLAY FOR MIXERS	91908	1
DISPLAY BOARD IMAGE RUBIMIX	26447	1



**⊙** 























### **DISPLAY RANGE LEVELING**

### PREMIUM DRILL BITS DESKTOP **DISPLAY**

# RUBI

































- · Cardboard dispenser display for the levelling range.
- · Dimensions: 74" x 29 1/2" x 19 5/16" (1880x750x490 mm).

	REF	
DISPLAY RANGE LEVELING	93056	1


- · Table-top metal dispenser for drill bits. It incorporates an anti-theft system.
- · Dimensions: 23" x 16" x 14 3/16" (590x406x360 mm).

	REF	
PREMIUM DRILL BITS DESKTOP DISPLAY	93800	1




# **SYMBOLOGY AND CERTIFICATIONS**

In this catalogue to provide reader's with the maximum amount of information and to be as clearly as possible, we have used the following symbols:

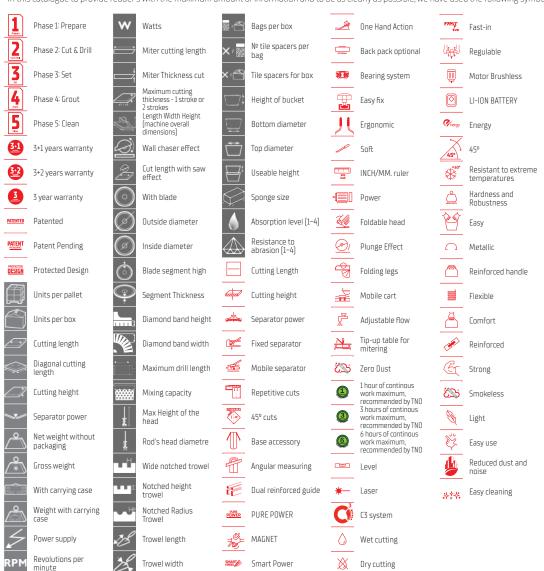

Germans Boada SA and its subsidiaries comply with the Directive 2002/96/EC on waste electrical and/or electronic and Directive 2002/95/
EC on the restriction of certain substances in their manufacture, applying the law of each member state according to EEC your specific criteria.
[WEEE. WEEE. ECORAEE. etc...] (RoHS).

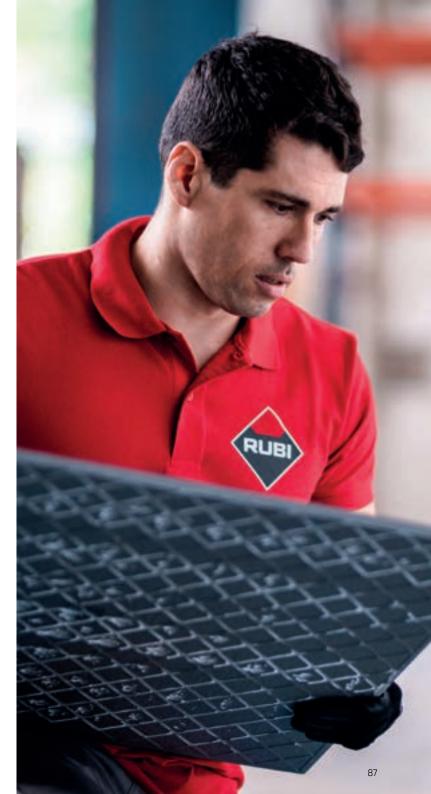

<sup>\*</sup> The gross weight of some electrical machines can vary depending on the type of pallet and carton type used in packaging.

<sup>\*\*</sup> Any manipulation of the machines voids the warranty. The warranty covers defects in manufacturing or assembly in accordance with applicable law.



# RUBICLUB

# **JOIN THE COMMUNITY OF 70.000+ EXPERTS IN** THE ART OF TILING

- 1. SIGN UP IN LESS THAN 1 MINUTE
- 2. EXTEND THE WARRANTY OF YOUR PURCHASES EASILY
- 3. GAIN ACCESS TO EXCLUSIVE BENEFITS AND GIFTS

## **SCAN THE QR CODE OR ENTER WWW.RUBI.COM**





aftersales@rubi.com rubi.com



# **RUBI GROUP**

### **RUBI TOOLS USA Inc.**

10702 NW 147th St Suite 100, Hialeah Gardens, FLORIDA 33018 USA P. 1 305 715 9892 F. 1 305 715 9898 warrantyusa@rubi.com

### PROUD MEMBER OF:











