



**Roca**

**Avalon**



# Avalon

Elegance in essence. A distinctive fusion of stone textures and advanced technology in a floor-to-wall format for extraordinary porcelain tiles. Avalon is an exceptional fusion of stone textures, combined in a unique way.

Glazed Porcelain

24"x48" R, 24"x24" R, 12"x24" R, 12"x36" R



# Avalon

Glazed Porcelain



**24"x48" R** 60x120 cm  
**24"x24" R** 60x60 cm  
**12"x24" R** 30x60 cm  
**12"x36" R** 30x90 cm




## Blanco




**24"x48" R**  
F107A54011



**24"x24" R**  
F107A60011




**12"x24" R**  
F107A57011

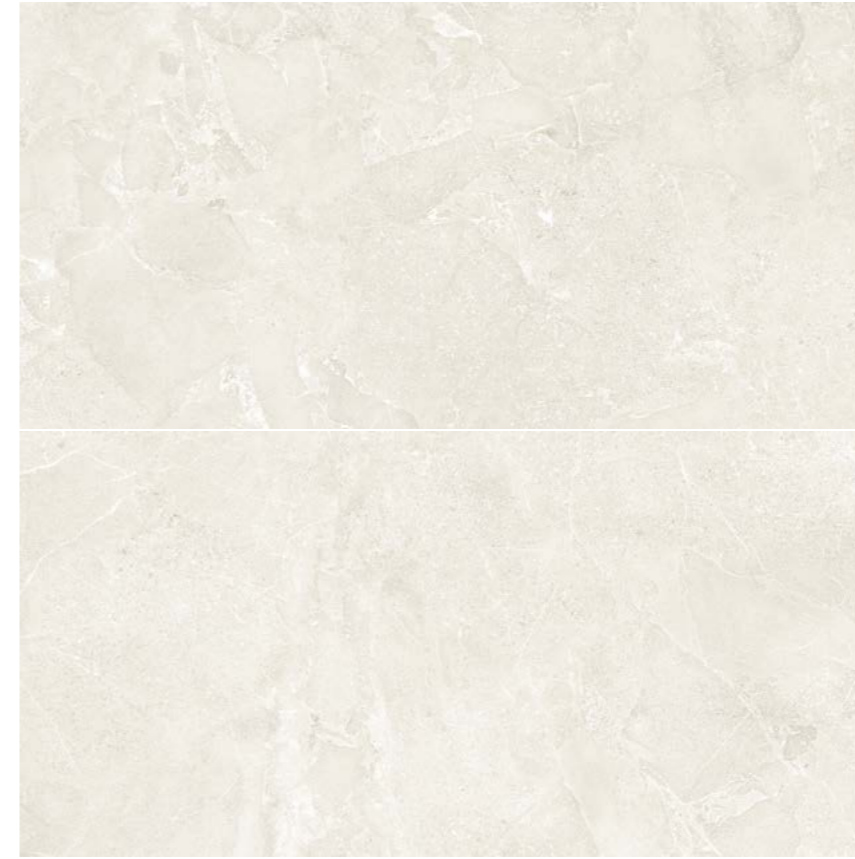


## Arena




**24"x48" R**  
F107A54371



**24"x24" R**  
F107A60371



**12"x24" R**  
F107A57371

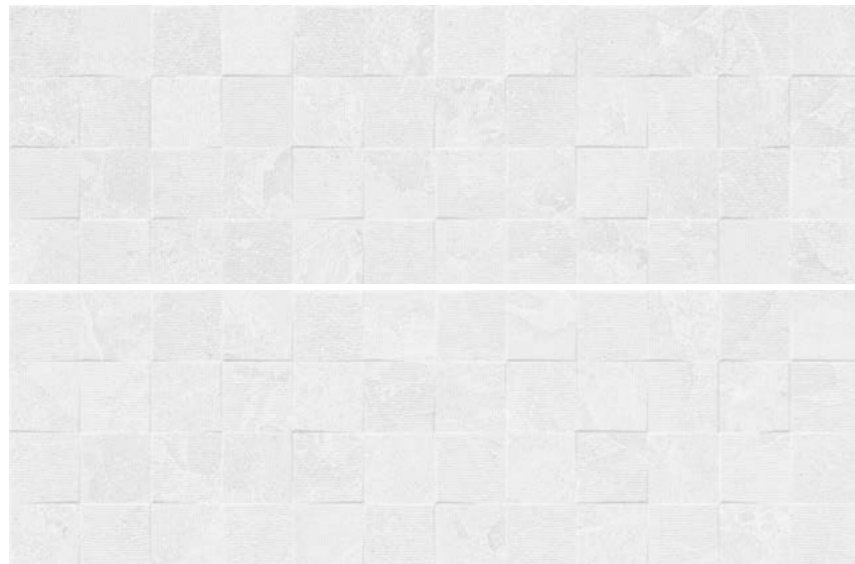

## Suite Blanco



**12"x36" R**  
F10B2AW011



## Suite Arena



**12"x36" R**  
F10B2AW371

# Avalon

Glazed Porcelain

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 350
Scratch Hardness	MOH's Scale	6
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	4
PEI - Glazed Tiles	C1027	5
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.50
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warping	C485	Pass
Wedging	C502	Pass

## Technical Specifications (Suite)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>=10%
Break Strength	C648	Min. 250
Scratch Hardness	MOH's Scale	-
Chemical Resistance	C650	Unaffected
Group	SEE FAQS	4
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warping	C485	Pass
Wedging	C502	Pass

## Packaging Information

Size	SF per carton	PC per carton	BX per pallet
12"x24" R	15.50	8	48
24"x24" R	15.50	4	30
24"x48" R	23.25	3	30

## Packaging Information

Size	SF per carton	PC per carton	BX per pallet
12"x36" R	14.53	5	51